


Selling Points

"V" Connector




— Movement

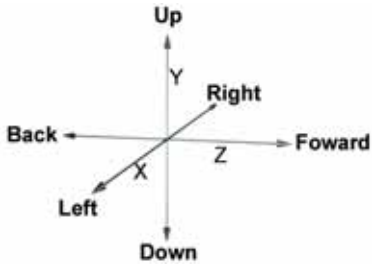


- Standard 2", 3" and 4" of movement on the X Y Z Axis
- Thermal expansion, and Seismic movement applications
- Custom fabrication for movements larger than 4"

— Limited Flow Loss

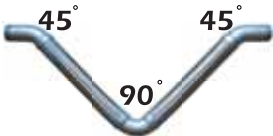


- Reduces flow loss with only 180° in change as compared to hard pipe loop or other similar braided connectors that have up to 360° in directional flow change

— Installation Options

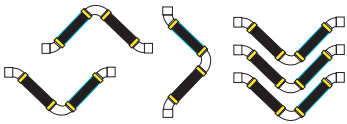


- Nested and vertical configuration
- Horizontal Run: hanging down, straight up and horizontally
- Drain or relief ports
- Variety of hanging tabs available

— Eliminate Equipment Stress



- V's do not induce pressure thrust onto piping system
- Nominal spring force

— Cost Effective

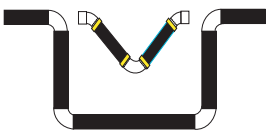

- Smaller anchor loads = NO expensive thrust blocks or anchors
- Limited pipe guides are needed when compared to Bellow EJ's
- V's use less space than pipe loops

— Custom



- Double braided for higher pressure and temperature applications
- Clean, Cap and Bag in house (CCB)
- All end fittings, drain ports and hanging tabs
- Multiple stainless steel grades and bronze available