




HEAT PUMP HOSE ASSEMBLIES

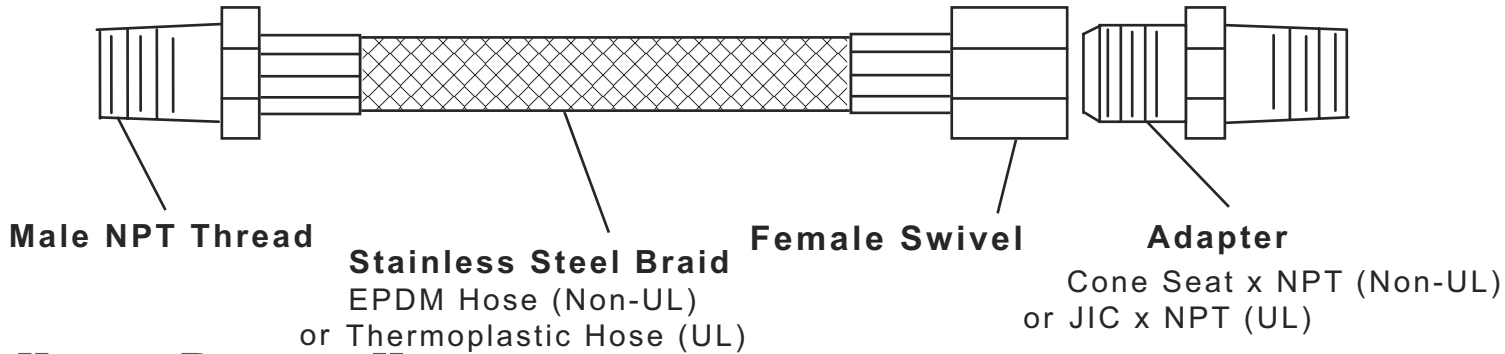

Heat Pump Hose

UL Approved

ASSEMBLY SIZE	1/2"	3/4"	1"	1-1/4"
WORKING PRESSURE	400 PSIG	300 PSIG	500 PSIG	400 PSIG
MINIMUM BURST PRESSURE	1600 PSIG	1200 PSIG	2000 PSIG	1600 PSIG
MINIMUM BEND RADIUS C/L	2.5"	4"	5.5"	10"
HOSE O.D.	.7"	.975"	1.245"	1.58"
TEMPERATURE RANGE	-40 F TO +200 F	-40 F TO +200 F	-40 F TO +200 F	-40 F TO +200 F

- * "FIRE RETARDANT THERMOPLASTIC TUBE" WHICH MEETS UL-94 WITH A VO RATING.
- * ABRASION RESISTANCE PROPERTIES FROM STAINLESS STEEL WIRE BRAIDING.
- * "WASHER-LESS" DESIGN OF THE SWIVEL END, PROVIDES EASE OF INSTALLATION.
- * INCREASED WATER FLOW DUE TO FLEXIBILITY OF THE HOSE.
- * ALL MALE PIPE THREADS ARE SHIPPED WITH THREAD SEALANT ALREADY APPLIED.
- * CRIMPED END FITTINGS ELIMINATE BANDS OR CLAMPS.
- * ZINC PLATED END FITTINGS AND ADAPTERS REDUCE CHANCE OF OVERTORQUING.
- * STANDARD LENGTHS- 12", 18", 24"& 36". OTHER LENGTHS AVAILABLE UPON REQUEST.
- * DELIVERY IS STOCK TO 30 DAYS A.R.O., AND DEPENDING ON QUANTITY ORDERED.

Heat Pump E

Non-UL Approved

ASSEMBLY SIZE	1/2"	3/4"	1"	1-1/4"
WORKING PRESSURE	375 PSIG	300 PSIG	225 PSIG	200 PSIG
MINIMUM BURST PRESSURE	1500 PSIG	1200 PSIG	900 PSIG	800 PSIG
MINIMUM BEND RADIUS C/L	2.5"	4"	5.5"	10"
HOSE O.D.	.7"	.975"	1.245"	1.58"
TEMPERATURE RANGE	5 F TO +212 F	5 F TO +212 F	5 F TO +212 F	5 F TO +212 F

- * EPDM INNER CORE
- * ABRASION RESISTANCE PROPERTIES FROM STAINLESS STEEL WIRE BRAIDING.
- * "WASHER-LESS" DESIGN OF THE SWIVEL END, PROVIDES EASE OF INSTALLATION.
- * INCREASED WATER FLOW DUE TO FLEXIBILITY OF THE HOSE.
- * ALL MALE PIPE THREADS ARE SHIPPED WITH THREAD SEALANT ALREADY APPLIED.
- * CRIMPED END FITTINGS ELIMINATE BANDS OR CLAMPS.
- * ZINC PLATED END FITTINGS AND ADAPTERS REDUCE CHANCE OF OVERTORQUING.
- * STANDARD LENGTHS- 12", 18", 24"& 36". OTHER LENGTHS AVAILABLE UPON REQUEST.
- * DELIVERY IS STOCK TO 30 DAYS A.R.O., AND DEPENDING ON QUANTITY ORDERED.