




HEAT PUMP HOSE ASSEMBLIES

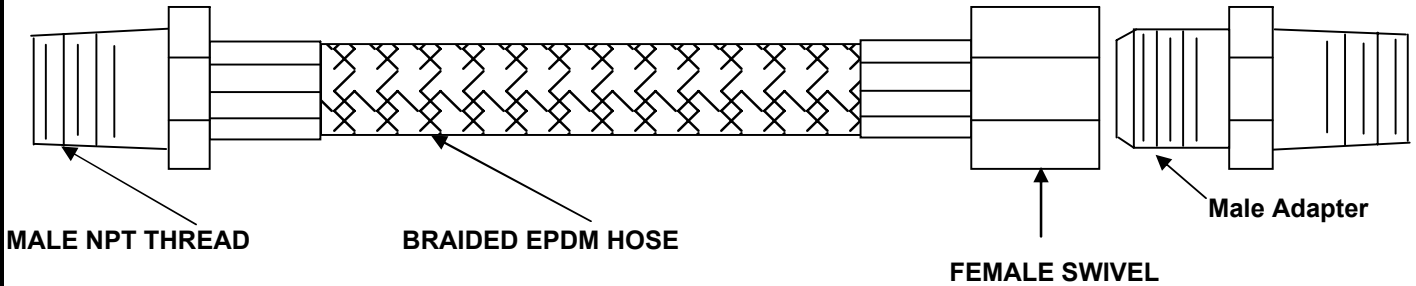

ASSEMBLY SIZE	1/2"	3/4"	1"	1-1/4"
WORKING PRESSURE	350 PSIG	300 PSIG	225 PSIG	200 PSIG
MINIMUM BURST PRESSURE	1400 PSIG	1200 PSIG	900 PSIG	800 PSIG
MINIMUM BEND RADIUS C/L	2"	3.25"	4"	5.25"
TEMPERATURE RANGE	25 F / 195 F	25 F / 195 F	25 F / 195 F	25 F / 195 F

- * EPDM INNER CORE
- * ABRASION RESISTANCE PROPERTIES FROM STAINLESS STEEL WIRE BRAIDING.
- * "WASHER-LESS" DESIGN OF THE SWIVEL END, PROVIDES EASE OF INSTALLATION.
- * INCREASED WATER FLOW DUE TO FLEXIBILITY OF THE HOSE.
- * CRIMPED END FITTINGS ELIMINATE BANDS OR CLAMPS.
- * BRASS END FITTINGS .
- * STANDARD LENGTHS- 12",18", 24", 36", 42" & 46". OTHER LENGTHS AVAILABLE UPON REQUEST.
- * DELIVERY IS STOCK TO 8 - 12 WEEKS A.R.O., AND DEPENDING ON QUANTITY ORDERED.

SIZE	QUANTITY OF EACH LENGTH					
	12"	18"	24"	36"	42"	46"
1/2"						
3/4"						
1"						
1-1/4"						

CUSTOMER:	
PROJECT:	
ENGINEER:	
PO#:	

TWIN CITY HOSE, INC 20615 COMMERCE BLVD. ROGERS, MN 55374

Phone 800-670-9475 Fax 763-428-5111 www.twincityhose.com