




TWIN CITY HOSE INC.

V-1

MFUS

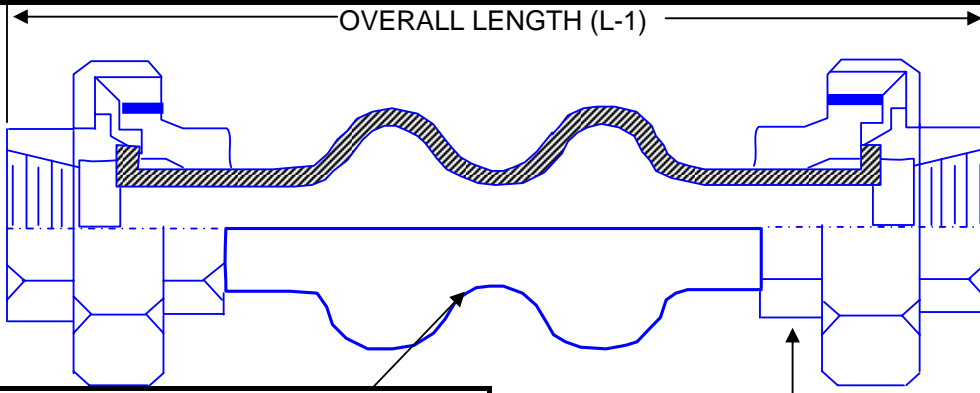

DESIGN DATA:
 MAXIMUM PRESSURE: 225 PSIG
 NEGATIVE PRESSURE: 26" HG VACUUM
 TEMPERATURE RANGE: 20°F-300°F
 NEOPRENE: 230°F
 EPDM: 250°F
 BUTYL: 250°F

BODY CONSTRUCTION

NEOPRENE/NYLON
EPDM/NYLON
BUTYL/NYLON

UNION 150# GALVANIZED FEMALE NPT

NOTE: PIPING MUST BE ANCHORED. PART MUST BE INSTALLED AT 8" NEUTRAL LENGTH..

CUSTOMER REF #	QTY REQ'D	MODEL NUMBER	PIPE SIZE	L-1 JOINT LENGTH	APPROX. WT LBS.	LATERAL DEF.	AXIAL EXT.	AXIAL COMP.	ANGULAR DEF.
		MFUS-2-3/4	3/4"	8"	1.6	7/8"	1/4"	7/8"	32°
		MFUS-2-1	1"	8"	2.6	7/8"	1/4"	7/8"	25°
		MFUS-2-1-1/4	1-1/4"	8"	3.3	7/8"	1/4"	7/8"	21°
		MFUS-2-1-1/2	1-1/2"	8"	4	7/8"	1/4"	7/8"	17°
		MFUS-2-2	2"	8"	5.5	7/8"	1/4"	7/8"	13°
		MFUS-2-2-1/2	2-1/2"	8"	9.5	7/8"	1/4"	7/8"	11°
		MFUS-2-3	3"	8"	10.6	7/8"	1/4"	7/8"	9°

CUSTOMER:

PROJECT:

ENGINEER:

PO#:

TWIN CITY HOSE, INC 20615 COMMERCE BLVD. ROGERS, MN 55374

Phone 800-670-9475 Fax 763-428-5111 www.twincityhose.com