




V 90 MMT 3"

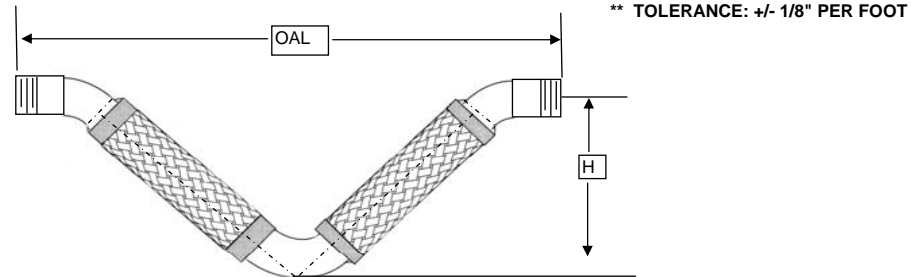

MATERIALS:

HOSE & BRAID: T-321 STAINLESS STEEL HOSE 1-LAYER T-304 BRAID

BRAID COLLAR: T-304 STAINLESS STEEL

FITTINGS: CARBON STEEL SCH. 40 MALE NPT

ELBOWS: SCH. 40 CARBON STEEL

QTY	SIZE	LIVE LENGTH	OAL DIM.	"H" DIM.	WRK PSIG	MAX TEST	MOTION X,Y,Z	INT. BEND RADIUS	BRAID COLLAR	45 ELBOW	90 ELBOW	END FTG
	1/2"	10"	26"	9.30"	796	1194	3"	5	1	0.625	1.5	6
	3/4"	11.75"	28"	10.50"	597	896	3"	7	1.5	0.4375	1.125	6
	1"	12.50"	31"	11.60"	455	683	3"	8	1.5	0.875	1.5	6
	1-1/4"	13.75"	35"	12.81"	441	662	3"	10	1.5	1	1.875	6
	1-1/2"	15.75"	37.50"	14.60"	370	555	3"	13	1.5	1.125	2.25	6
	2"	17.25"	41.50"	16.35"	370	555	3"	16	1.5	1.375	3	6
	2.5"	19.75"	48"	19.25"	580	870	3"	21	2	1.75	3.75	6
	3"	21.50"	52.50"	21.25"	460	690	3"	25	2	2	4.5	6

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200 F	250F	300F	350F	400F	500F	600F	700F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

CUSTOMER:

PROJECT:

ENGINEER:

PO#:

TWIN CITY HOSE, INC 20615 COMMERCE BLVD. ROGERS, MN 55374

Phone 800-670-9475 Fax 763-428-5111 www.twincityhose.com