




TWIN CITY HOSE INC.

RG VIB-ABSORBERS

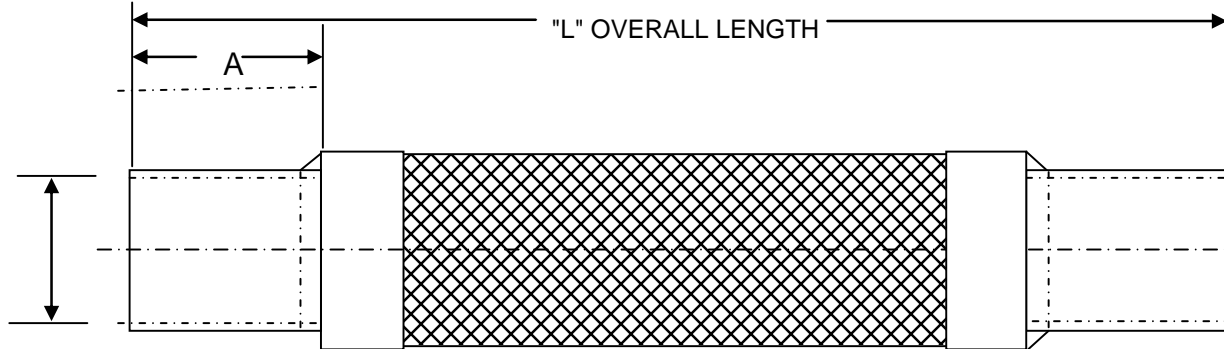

QTY	NOM. HOSE I.D.	MODEL NUMBER	TO FIT COPPER TUBE		DIMENSIONS		MAX. PSIG @ 70 DEG. F.	U.L. + BURST P.S.I.G.	APPROX. WEIGHT LBS.
			NOM. SIZE	ACTUAL O.D.	A +/-	L +/-			
	1/4"	VIB-2	1/8"	1/4"	1/2"	7-1/2"	450	2250	0.17
	3/8"	VIB-3	1/4"	3/8"	5/8"	8-1/4"	450	2250	0.3
	3/8"	VIB-4	3/8"	1/2"	3/4"	9"	450	2250	0.33
	1/2"	VIB-5	1/2"	5/8"	7/8"	9-3/4"	450	2250	0.44
	1/2"	VIB-6	5/8"	3/4"	1"	10"	450	2250	0.44
	3/4"	VIB-7	5/8"	3/4"	1-1/8"	11-1/4"	440	2200	0.78
	3/4"	VIB-8	3/4"	7/8"	1-1/4"	11-1/2"	440	2200	0.84
	1"	VIB-9	1"	1-1/8"	1-1/2"	13"	400	2000	1.2
	1-1/4"	VIB-10	1-1/4"	1-3/8"	1-5/8"	14-3/4"	480	2400	2
	1-1/2"	VIB-11	1-1/2"	1-5/8"	2"	17"	420	2100	2.8
	2" **	VIB-12	2"	2-1/8"	2-1/2"	20"	190	950	4.5
	2"	VIB-12SS	2"	2-1/8"	2-1/2"	20"	350	1750	3.8
	2-1/2"	VIB-13SS	2-1/2"	2-5/8"	3"	24"	320	1600	5.4
	3"	VIB-14SS	3"	3-1/8"	3-1/2"	27"	302	1510	7.5
	3-1/2" **	VIB-15SS	3-1/2"	3-5/8"	4"	32"	168	840	13.4
	4"	VIB-16SS	4"	4-1/8"	4-1/2"	32"	168	840	18

- * VIB-2 through and including VIB-11 can be provided in stainless steel construction.
- * Pricing on request.
- * All parts are fabricated by certified brazers.
- * All SS units are constructed with stainless steel hose and braid, copper connections.
- * UL file No. 6270 (Recognized for use In Canada)
- * Units are cleaned, dried and sealed in polyethylene film.
- * ** For low side use only.
- * + Minimum Burst Pressure of U.L. Tested Units.

CUSTOMER:	
PROJECT:	
ENGINEER:	
PO#:	

TWIN CITY HOSE, INC 20615 COMMERCE BLVD. ROGERS, MN 55374

Phone 800-670-9475 Fax 763-428-5111 www.twincityhose.com