


### TCHB - CHMMT OPEN OAL



#### MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER HEX MALE NPT

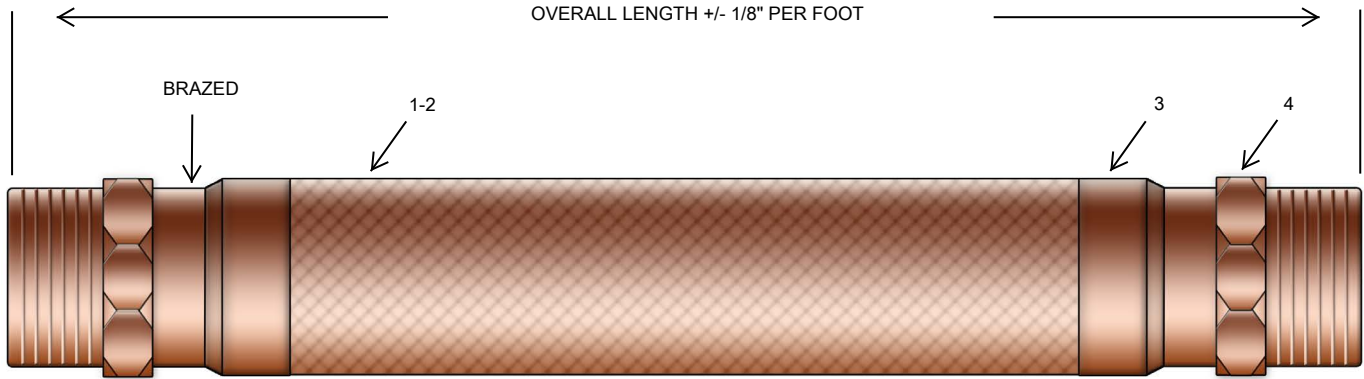

| QTY | MODEL NUMBER         | SIZE   | OVERALL LENGTH | WRK. PSIG | MAX TEST | @ TEMP. | LATERAL OFFSET |
|-----|----------------------|--------|----------------|-----------|----------|---------|----------------|
|     | TCHB-025-CHMMT-(OAL) | 1/4"   |                | 934       | 1401     | 70° F   |                |
|     | TCHB-038-CHMMT-(OAL) | 3/8"   |                | 704       | 1056     | 70° F   |                |
|     | TCHB-050-CHMMT-(OAL) | 1/2"   |                | 566       | 849      | 70° F   |                |
|     | TCHB-075-CHMMT-(OAL) | 3/4"   |                | 468       | 701      | 70° F   |                |
|     | TCHB-100-CHMMT-(OAL) | 1"     |                | 334       | 501      | 70° F   |                |
|     | TCHB-125-CHMMT-(OAL) | 1 1/4" |                | 306       | 459      | 70° F   |                |
|     | TCHB-150-CHMMT-(OAL) | 1 1/2" |                | 297       | 445      | 70° F   |                |
|     | TCHB-200-CHMMT-(OAL) | 2"     |                | 210       | 315      | 70° F   |                |
|     | TCHB-250-CHMMT-(OAL) | 2 1/2" |                | 194       | 291      | 70° F   |                |
|     | TCHB-300-CHMMT-(OAL) | 3"     |                | 166       | 249      | 70° F   |                |
|     | TCHB-400-CHMMT-(OAL) | 4"     |                | 145       | 217      | 70° F   |                |

| TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG |        |        |        |        |        |
|--|--------|--------|--------|--------|--------|
| 150° F   | 200° F | 250° F | 300° F | 350° F | 400° F |
| 0.92   | 0.89   | 0.86   | 0.83   | 0.81   | 0.78   |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: