


U LOOP WELD END 2"

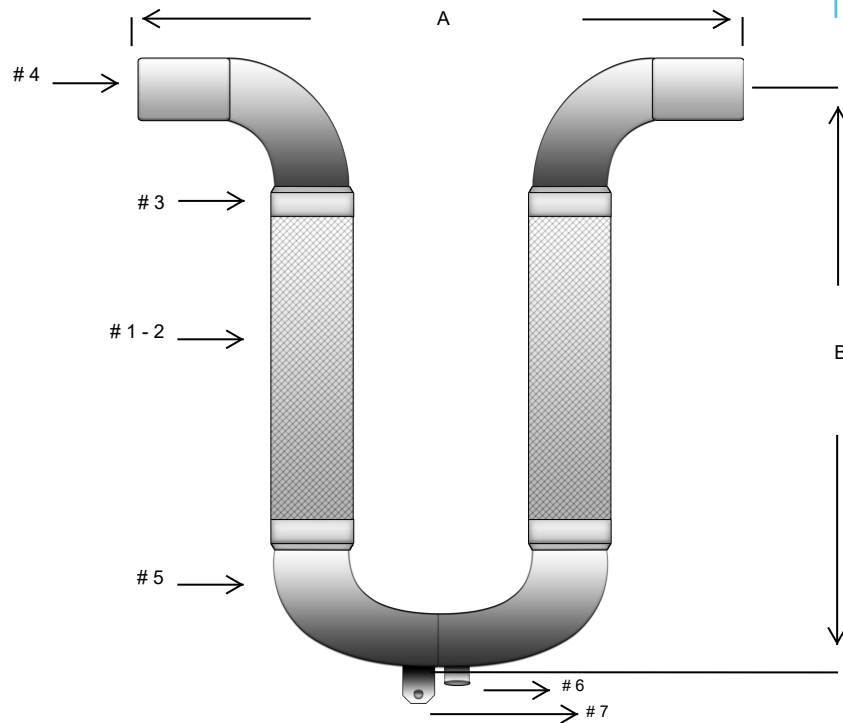

MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL WELD ENDS

#5 ELBOWS: SCH. 40 CARBON STEEL

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):

*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)



| QTY | MODEL # | SIZE | "A" DIM. | "B" DIM. | WRK. PSIG | MAX TEST | @ TEMP. | LATERAL OFFSET | WT. LBS. |
|-----|----------|--------|----------|----------|-----------|----------|---------|----------------|----------|
| | SL200282 | 2" | 19 1/2" | 22 1/2" | 370 | 555 | 70°F | 2" | 11 |
| | SL250282 | 2 1/2" | 21 3/4" | 23" | 390 | 585 | 70°F | 2" | 19 |
| | SL300282 | 3" | 24" | 25 3/4" | 250 | 375 | 70°F | 2" | 26 |
| | SL400282 | 4" | 30" | 31" | 210 | 315 | 70°F | 2" | 45 |
| | SL500282 | 5" | 36" | 38" | 167 | 251 | 70°F | 2" | 75 |
| | SL600282 | 6" | 42" | 41 1/2" | 165 | 248 | 70°F | 2" | 116 |
| | SL800282 | 8" | 56" | 53 1/4" | 220 | 330 | 70°F | 2" | 235 |
| | SL010282 | 10" | 68" | 61 3/4" | 175 | 263 | 70°F | 2" | 402 |
| | SL012282 | *12" | 80" | 71" | 160 | 240 | 70°F | 2" | 586 |

| TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG | | | | | | | | | |
|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 200° F | 250° F | 300° F | 350° F | 400° F | 500° F | 600° F | 700° F | 800° F | 900° F |
| 0.94 | 0.92 | 0.88 | 0.86 | 0.83 | 0.78 | 0.74 | 0.7 | 0.66 | 0.62 |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: