


V90 GROOVE 2"



MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID COLLAR: STAINLESS STEEL
- #4 END FITTINGS: SCH.40 CARBON STEEL GROOVE
- #5 ELBOWS: SCH. 40 CARBON STEEL

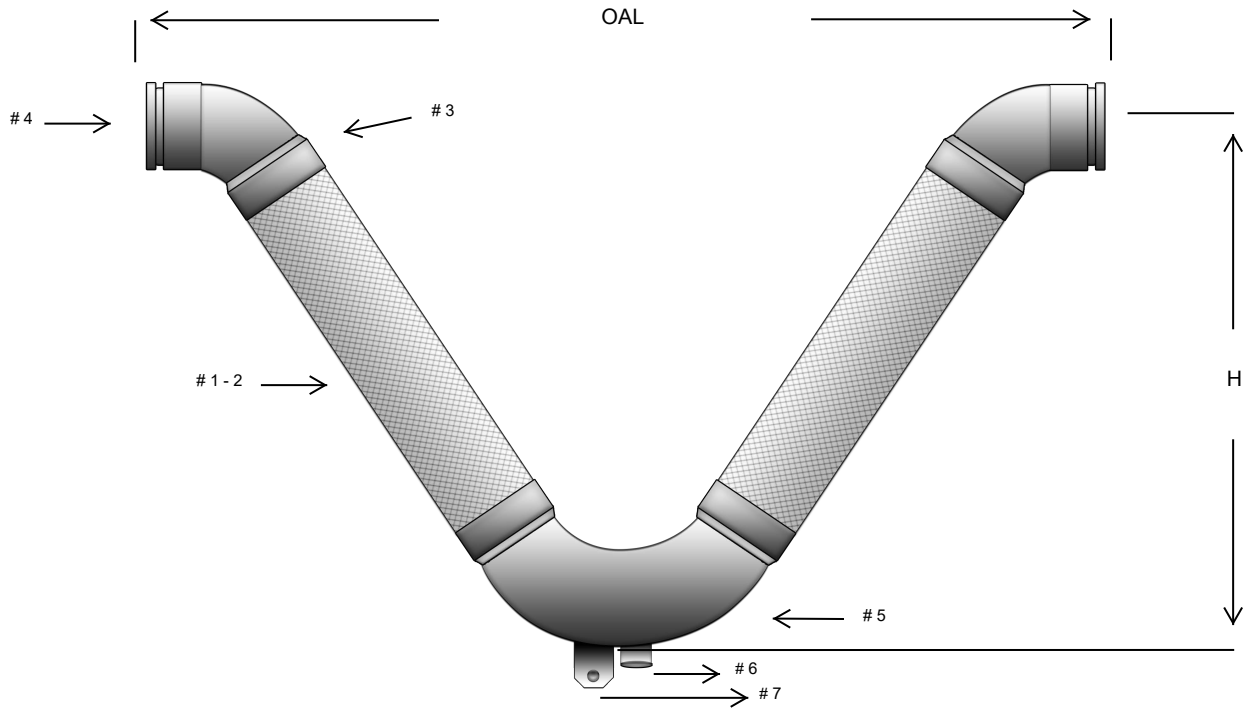

*12" ID AND LARGER ARE SCHEDULE STANDARD (STD) #6 PORT (OPTIONAL): #7 HANGER (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	SV200762	2"	36 3/4"	14"	370	555	2"	13
	SV250762	2 1/2"	37 1/2"	13 3/4"	390	585	2"	19
	SV300762	3"	40 3/4"	15 1/4"	250	375	2"	25
	SV400762	4"	47"	17 3/4"	210	315	2"	43
	SV500762	5"	56 1/4"	21 1/2"	167	251	2"	59
	SV600762	6"	60 1/2"	23"	165	248	2"	98
	SV800762	8"	77 3/4"	29"	220	330	2"	195
	SV010762	10"	88 1/2"	32 3/4"	175	263	2"	328
	SV012762	*12"	100"	37 1/4"	160	240	2"	450

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: