


TCHS - GR Metric

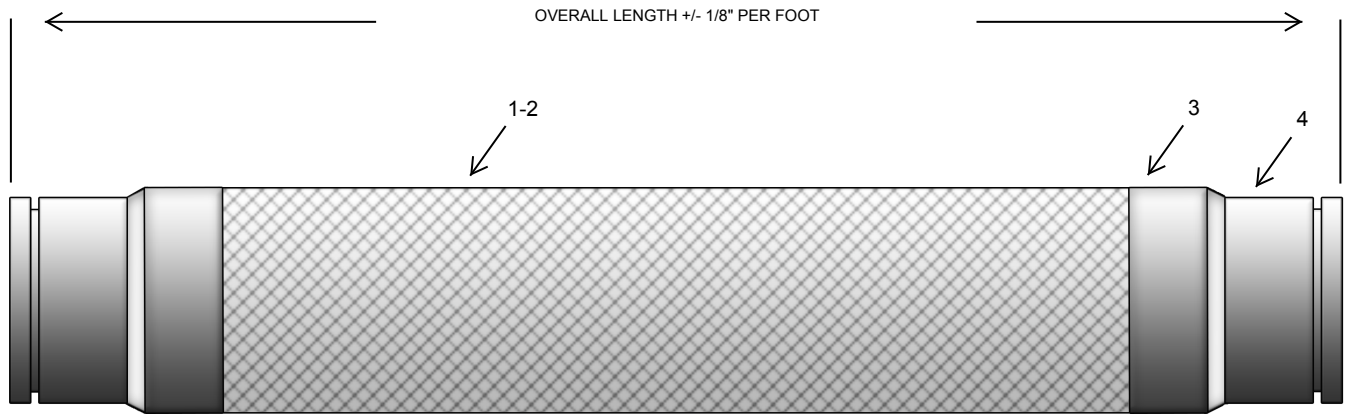

MATERIALS

- #1-2 HOSE & BRAID: T-321 STAINLESS STEEL HOSE 1-LAYER BRAID STAINLESS STEEL
- #3 BRAID BAND: T-304 STAINLESS STEEL
- #4 GROOVE FITTING: SCH. 40 CARBON STEEL

QTY	MODEL NUMBER	SIZE	OVERALL LENGTH	MAX O.D.	PRESSURE (PSIG)		TEMP ° C	MOTION LATERAL	WT. LBS.
					OPER.	TEST			
	TCHS-150-GR	38.1MM	304.8MM	48.514MM	370	555	21° C	9.525MM	10
	TCHS-200-GR	50.8MM	304.8MM	66.04MM	370	555	21° C	9.525MM	10
	TCHS-250-GR	63.5MM	355.6MM	78.74MM	390	585	21° C	9.525MM	12
	TCHS-300-GR	76.2MM	355.6MM	95.25MM	250	375	21° C	9.525MM	13
	TCHS-400-GR	101.6MM	406.4MM	121.92MM	210	315	21° C	12.7MM	18
	TCHS-500-GR	127MM	431.8MM	149.86MM	167	251	21° C	12.7MM	25
	TCHS-600-GR	152.4MM	457.2MM	177.8MM	165	248	21° C	12.7MM	28
	TCHS-800-GR	203.2MM	508MM	228.6MM	220	330	21° C	12.7MM	50
	TCHS-1000-GR	254MM	609.6MM	279.4MM	175	263	21° C	19.05MM	70
	TCHS-1200-GR	304.8MM	635MM	330.2MM	160	240	21° C	19.05MM	90
	TCHS-1400-GR	355.6MM	685.8MM	406.4MM	110	165	21° C	19.05MM	110

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG								
93° C	121° C	148° C	176° C	204° C	260° C	315° C	371° C	
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: