


### TCHS - SFLG OPEN OAL

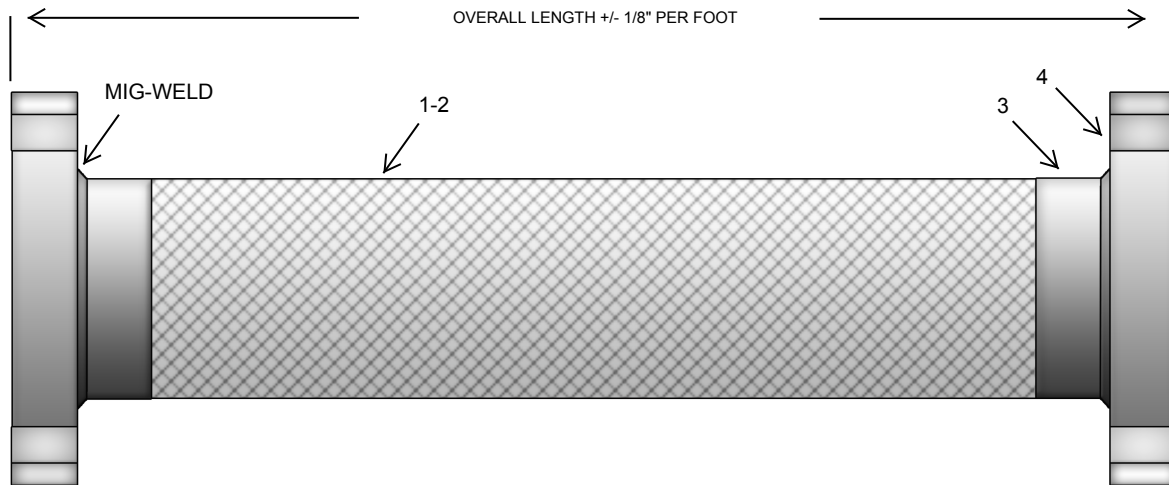

**MATERIALS**

#1-2 HOSE: STAINLESS STEEL HOSE WITH 1 LAYER OF STAINLESS STEEL BRAID

#3 BRAID COLLAR: T-304 STAINLESS STEEL

#4 FLANGES: STAINLESS STEEL 304 PLATE FLANGES 150# DRILL

QTY	MODEL NUMBER	SIZE	OPEN OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET
	TCHS-150-SFLG-(OAL)	1 1/2"		5 1/2"	370	555	70° F	
	TCHS-200-SFLG-(OAL)	2"		6"	370	555	70° F	
	TCHS-250-SFLG-(OAL)	2 1/2"		7"	390	585	70° F	
	TCHS-300-SFLG-(OAL)	3"		7 1/2"	250	375	70° F	
	TCHS-400-SFLG-(OAL)	4"		9"	210	315	70° F	
	TCHS-500-SFLG-(OAL)	5"		10"	167	251	70° F	
	TCHS-600-SFLG-(OAL)	6"		11"	165	248	70° F	
	TCHS-800-SFLG-(OAL)	8"		13 1/2"	220	330	70° F	
	TCHS-1000-SFLG-(OAL)	10"		16"	175	263	70° F	
	TCHS-1200-SFLG-(OAL)	12"		19"	160	240	70° F	
	TCHS-1400-SFLG-(OAL)	14"		21"	110	165	70° F	
	TCHS-1600-SFLG-(OAL)	16"		23 1/2"	110	165	70° F	

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG								
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: