


TCHS - GRPF OPEN OAL



MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 END FITTING: CARBON STEEL PLATE FLANGE 150# DRILL

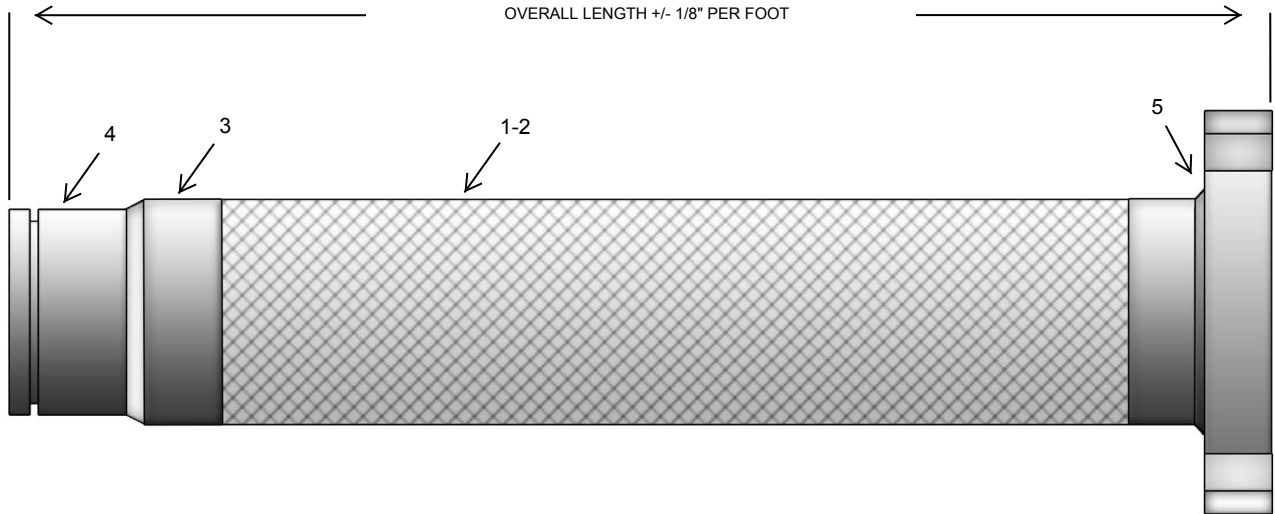

| QTY | MODEL NUMBER | SIZE | OVERALL LENGTH | MAX O.D. | PRESSURE (PSIG) | | TEMP °F | MOTION | |
|-----|----------------------|--------|----------------|----------|-----------------|------|---------|---------|-------|
| | | | | | OPER. | TEST | | LATERAL | OTHER |
| | TCHS-200-GRPF-(OAL) | 2" | | 2.46" | 370 | 555 | 70° F | | |
| | TCHS-250-GRPF-(OAL) | 2 1/2" | | 3.45" | 400 | 600 | 70° F | | |
| | TCHS-300-GRPF-(OAL) | 3" | | 4.01" | 288 | 431 | 70° F | | |
| | TCHS-400-GRPF-(OAL) | 4" | | 5.03" | 250 | 375 | 70° F | | |
| | TCHS-500-GRPF-(OAL) | 5" | | 6.1" | 200 | 300 | 70° F | | |
| | TCHS-600-GRPF-(OAL) | 6" | | 7.15" | 220 | 330 | 70° F | | |
| | TCHS-800-GRPF-(OAL) | 8" | | 9.44" | 215 | 323 | 70° F | | |
| | TCHS-1000-GRPF-(OAL) | 10" | | 11.49" | 200 | 350 | 70° F | | |
| | TCHS-1200-GRPF-(OAL) | 12" | | 13.51" | 160 | 240 | 70° F | | |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: