


TCHS-MMT 3/4" OFFSET

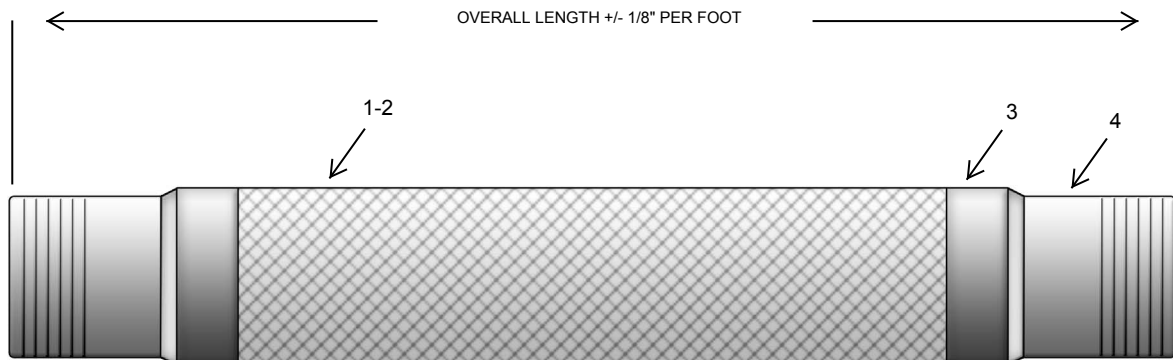

MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID COLLAR: STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

QTY	MODEL NUMBER	SIZE	OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	TCHS-025-MMT-8	1/4"	8	.42"	2240	3360	70° F	3/4"	2
	TCHS-038-MMT-8.5	3/8"	8.5	.62"	1100	1650	70° F	3/4"	2
	TCHS-050-MMT-9.5	1/2"	9.5	.76"	796	1194	70° F	3/4"	2
	TCHS-075-MMT-9.5	3/4"	9.5	1.03"	597	895	70° F	3/4"	2
	TCHS-100-MMT-11	1"	11	1.32"	455	682	70° F	3/4"	2
	TCHS-125-MMT-13	1 1/4"	13	1.63"	441	661	70° F	3/4"	2
	TCHS-150-MMT-13.5	1 1/2"	13.5	1.91"	370	555	70° F	3/4"	3
	TCHS-200-MMT-16	2"	16	2.46"	370	555	70° F	3/4"	3
	TCHS-250-MMT-15	2 1/2"	15	3.45"	400	600	70° F	3/4"	6
	TCHS-300-MMT-16	3"	16	4.01"	288	431	70° F	3/4"	10
	TCHS-400-MMT-17	4"	17	5.03"	250	375	70° F	3/4"	12

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: