




UL CLASSIFIED MH59973
UL TCHB - FS

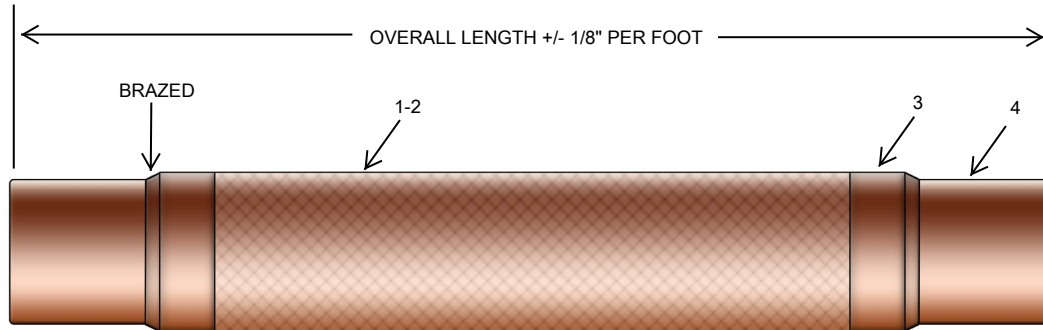

MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER FEMALE SWEAT END

| QTY | MODEL NUMBER | SIZE | OVERALL LENGTH | WRK. PSIG | MAX TEST | @ TEMP. | LATERAL OFFSET | WT. LBS. |
|-----|----------------|--------|----------------|-----------|----------|---------|----------------|----------|
| | UL-TCHB-050-FS | 1/2" | 6 1/2" | 566 | 849 | 70° F | 1/16" | 1 |
| | UL-TCHB-075-FS | 3/4" | 7" | 468 | 701 | 70° F | 1/16" | 1 |
| | UL-TCHB-100-FS | 1" | 8" | 334 | 501 | 70° F | 1/16" | 1 |
| | UL-TCHB-125-FS | 1 1/4" | 8 1/2" | 306 | 459 | 70° F | 1/16" | 2 |
| | UL-TCHB-150-FS | 1 1/2" | 9" | 297 | 445 | 70° F | 1/16" | 3 |
| | UL-TCHB-200-FS | 2" | 10 1/2" | 210 | 315 | 70° F | 1/16" | 4 |
| | UL-TCHB-250-FS | 2 1/2" | 12" | 194 | 291 | 70° F | 1/16" | 5 |
| | UL-TCHB-300-FS | 3" | 12" | 166 | 249 | 70° F | 1/16" | 8 |
| | UL-TCHB-400-FS | 4" | 12" | 145 | 217 | 70° F | 1/16" | 13 |

| TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG | | | | | |
|--|--------|--------|--------|--------|--------|
| 150° F | 200° F | 250° F | 300° F | 350° F | 400° F |
| 0.92 | 0.89 | 0.86 | 0.83 | 0.81 | 0.78 |

DRAWN BY: _____ DRAWING NUMBER: _____ REV: _____
 SIGNATURE: _____ DATE: _____
 PO NUMBER: _____ PROJECT: _____
 CUSTOMER: _____ NOTES: _____