


**TCHS - GRPF OPEN OAL**

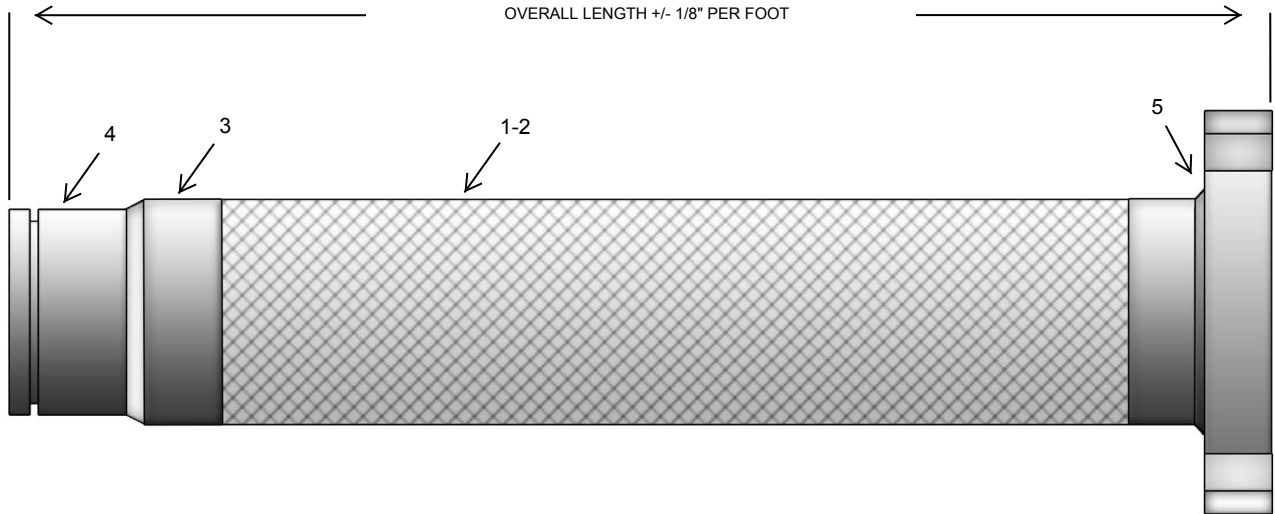

**MATERIALS**

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID BAND: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 END FITTING: CARBON STEEL PLATE FLANGE 150# DRILL

QTY	MODEL NUMBER	SIZE	OVERALL LENGTH	MAX O.D.	PRESSURE (PSIG)		TEMP °F	MOTION LATERAL
					OPER.	TEST		
	TCHS-200-GRPF-(OAL)	2"		2.46"	370	555	70° F	
	TCHS-250-GRPF-(OAL)	2 1/2"		3.45"	400	600	70° F	
	TCHS-300-GRPF-(OAL)	3"		4.01"	288	431	70° F	
	TCHS-400-GRPF-(OAL)	4"		5.03"	250	375	70° F	
	TCHS-500-GRPF-(OAL)	5"		6.1"	200	300	70° F	
	TCHS-600-GRPF-(OAL)	6"		7.15"	220	330	70° F	
	TCHS-800-GRPF-(OAL)	8"		9.44"	215	323	70° F	
	TCHS-1000-GRPF-(OAL)	10"		11.49"	200	350	70° F	
	TCHS-1200-GRPF-(OAL)	12"		13.51"	160	240	70° F	

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: