


TFEP3F 8

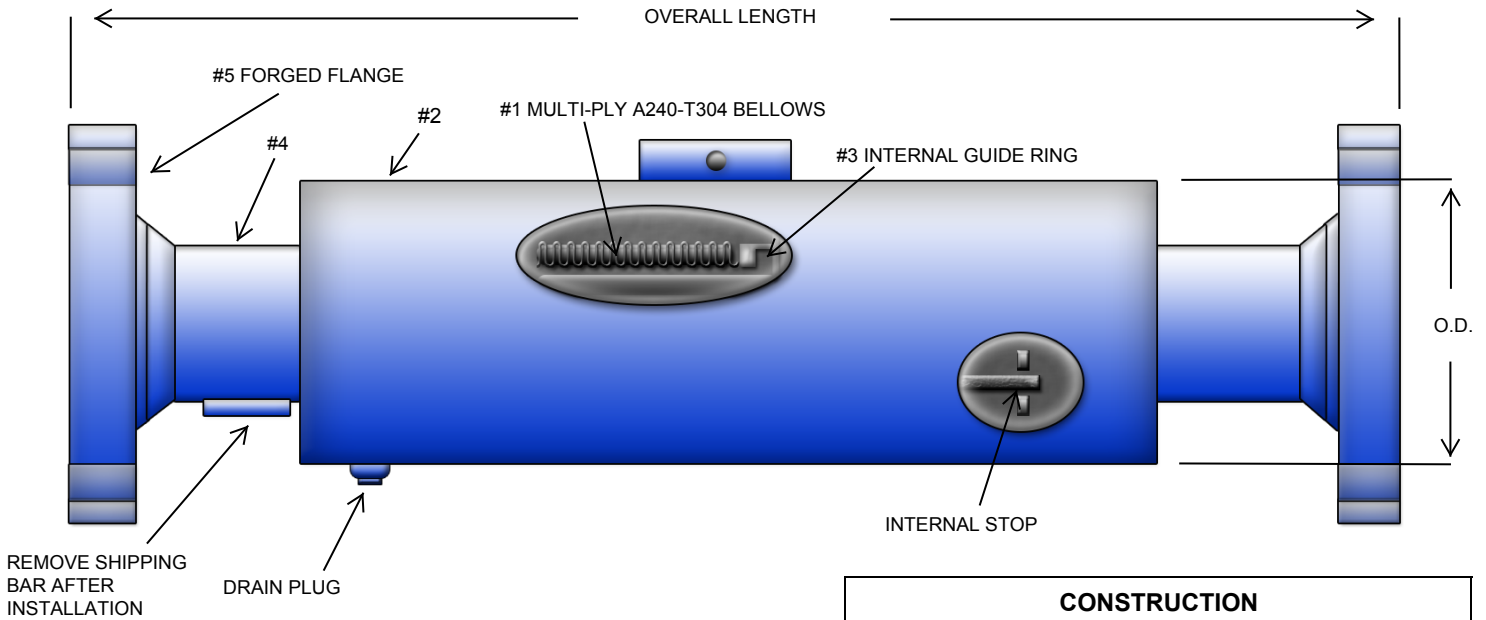

CONSTRUCTION		
P/N#	DESCRIPTION	MATERIALS
1	BELLOWS	3-PLY-A240-304
2	PIPE	A-53/106 C.S.
3	GUIDE RING	A285-GR. C
4	WELD END	A-53/106 C.S.
5	FLANGE	300# B16.5 C.S.

NOTE:
 FOR & 2 5 5 (& Ø OPERATION ALL PIPING MUST
 BE PROPERLY ANCHORED AND GUIDED

QTY	SIZE	OVERALL LENGTH	MAX PSIG	AXIAL COMP.	AXIAL EXT.	OUTSIDE DIAMETER	EFFECTIVE AREA IN.SQ.	WEIGHT (LBS.)	6 3 5 , 1 * 5 \$ 7 (/ % 6 , 1
	2 1/2"	51"	300	8"	1 1/2"	6 5/8"	16	115	
	3"	51"	300	8"	1 1/2"	6 5/8"	35	121	
	4"	51"	300	8"	1 1/2"	10 3/4"	35	260	
	5"	51"	300	8"	1 1/2"	10 3/4"	54	290	
	6"	51"	300	8"	1 1/2"	12 3/4"	88	313	
	8"	53"	300	8"	1 1/2"	14 1/2"	118	555	
	10"	53"	300	8"	1 1/2"	14"	163	630	
	12"	53"	300	8"	1 1/2"	16"	163	805	

NOTE: PRESSURE THRUST= EFFECTIVE AREA X THE MAXIMUM WORKING PRESSURE.

' 5 \$: 1 % <

DRAW , N * 1 8 0 % (5 :

5 (9

6 , * 1 \$ 7 8 5 (

' \$ 7 (

3 2 1 8 0 % (5

PROJECT:

& 8 6 7 2 0 (5

1 2 7 (6