




**RCFF**

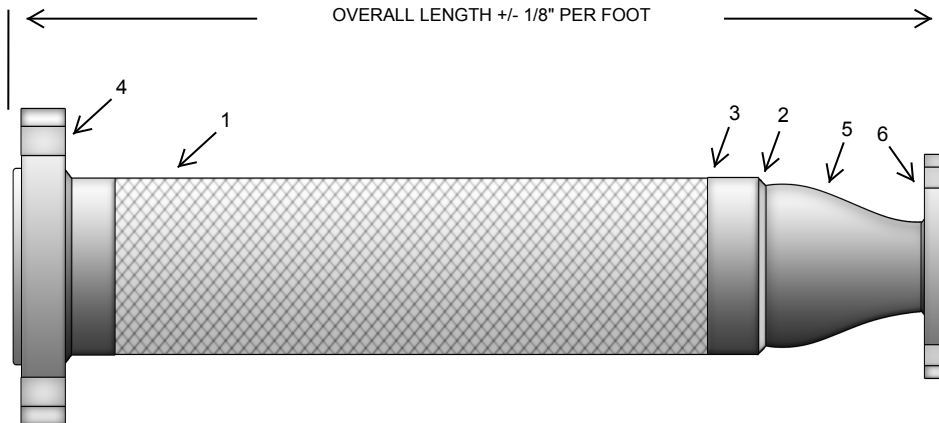

**MATERIALS**

- #1 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #2, #3 BRAID COLLAR: STAINLESS STEEL
- #4, #6 END FITTINGS: CARBON STEEL RFSO FLANGE 150# DRILL
- #5 REDUCER: SCH. 40 CARBON STEEL CONCENTRIC WELD REDUCER  
\*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

QTY	MODEL NUMBER	DESCRIPTION	WRK. PSI	@ TEMP.	LATERAL OFFSET	OAL	MIN. OAL	LARGE END SIZE	SMALL END SIZE
	RCFF1210-CRN	*12" X 10" X (OAL) REDUCER	118	70° F			22"	12"	10"
	RCFF1008-CRN	10" X 8" X (OAL) REDUCER	118	70° F			20"	10"	8"
	RCFF1006-CRN	10" X 6" X (OAL) REDUCER	118	70° F			20"	10"	6"
	RCFF0806-CRN	8" X 6" X (OAL) REDUCER	230	70° F			20"	8"	6"
	RCFF0805-CRN	8" X 5" X (OAL) REDUCER	230	70° F			20"	8"	5"
	RCFF0804-CRN	8" X 4" X (OAL) REDUCER	230	70° F			20"	8"	4"
	RCFF0605-CRN	6" X 5" X (OAL) REDUCER	134	70° F			19"	6"	5"
	RCFF0604-CRN	6" X 4" X (OAL) REDUCER	134	70° F			19"	6"	4"
	RCFF0603-CRN	6" X 3" X (OAL) REDUCER	134	70° F			19"	6"	3"
	RCFF0504-CRN	5" X 4" X (OAL) REDUCER	134	70° F			18"	5"	4"
	RCFF0503-CRN	5" X 3" X (OAL) REDUCER	134	70° F			18"	5"	3"
	RCFF0525-CRN	5" X 2-1/2" X (OAL) REDUCER	134	70° F			18"	5"	2 1/2"
	RCFF0403-CRN	4" X 3" X (OAL) REDUCER	167	70° F			15"	4"	3"
	RCFF0425-CRN	4" X 2-1/2" X (OAL) REDUCER	167	70° F			15"	4"	2 1/2"
	RCFF0402-CRN	4" X 2" X (OAL) REDUCER	167	70° F			15"	4"	2"
	RCFF0325-CRN	3" X 2-1/2" X (OAL) REDUCER	167	70° F			15"	3"	2 1/2"
	RCFF0302-CRN	3" X 2" X (OAL) REDUCER	167	70° F			15"	3"	2"
	RCFF2502-CRN	2-1/2" X 2" X (OAL) REDUCER	285	70° F			15"	2 1/2"	2"

LATERAL OFFSET IS DEPENDANT ON OAL

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG					
200° F	300° F	400° F	500° F	600° F	700° F
0.9	0.82	0.7	0.59	0.49	0.43

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: