


EXCF

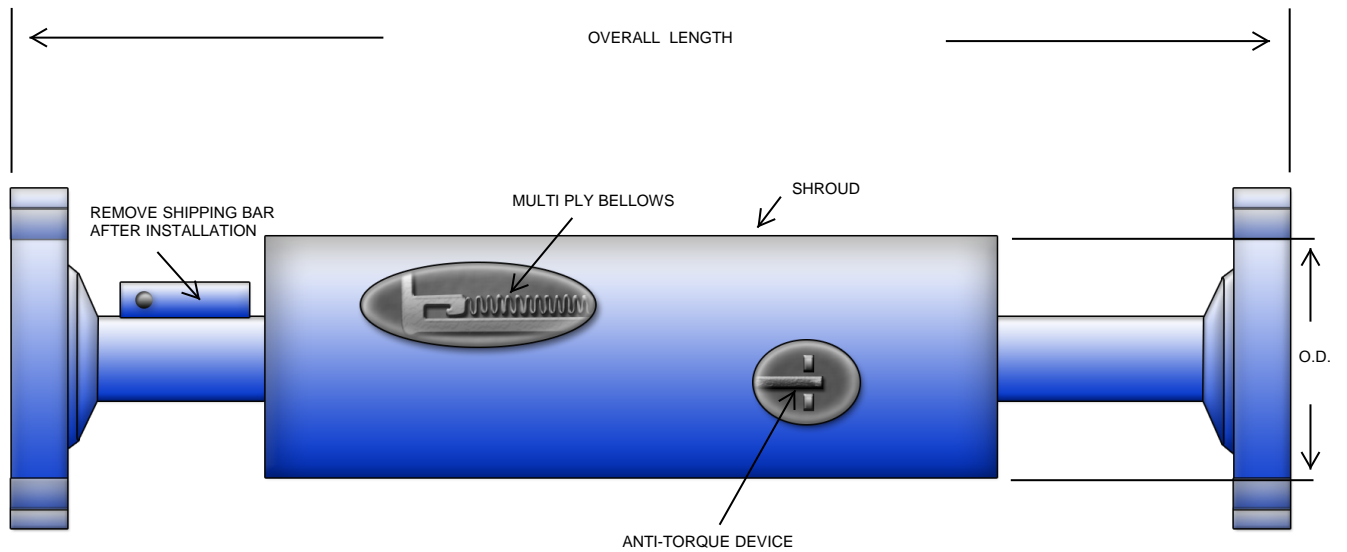

NOTE:
 FOR PROPER OPERATION ALL PIPING MUST
 BE PROPERLY ANCHORED AND GUIDED PER
 EXPANSION JOINT MANUFACTURERS
 ASSOCIATION STANDARDS

DESIGN DATA:
 MAX. WRK. PRESSURE: 200 P.S.I.G.
 TEST PRESSURE: 300 P.S.I.G.
 MAX TEMP 700° F
 1 3/4" AXIAL COMPRESSION
 1/4" AXIAL EXTENSION

QTY	PIPE SIZE	MODEL NUMBER	OVERALL LENGTH	OUTSIDE DIAMETER	EFFECTIVE AREA	APROX. WEIGHT	SPRING RATE BS IN
	3/4"	EXCF075	12 5/8"	3 7/8"	2.2	9.5	45 50
	1"	EXCF100	12 5/8"	4 1/4"	3.5	12	182 03
	1 1/4"	EXCF125	14 5/8"	4 5/8"	4.8	16.2	207 62
	1 1/2"	EXCF150	14 5/8"	5"	6.5	19.3	196 48
	2"	EXCF200	14 5/8"	6"	7.6	24.2	225 03
	2 1/2"	EXCF250	16"	7"	12.9	36.6	398 68
	3"	EXCF300	15 3/4"	7 1/2"	16.1	43.5	413 64
	4"	EXCF400	15 3/4"	9"	24.2	54.5	499 06

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: