


EXCS

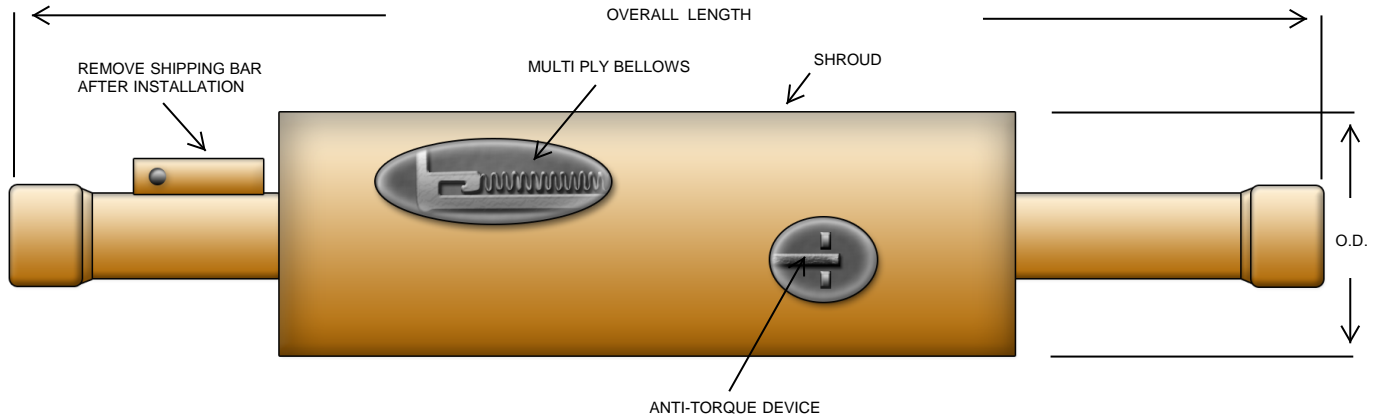

NOTE:
FOR PROPER OPERATION ALL PIPING MUST
BE PROPERLY ANCHORED AND GUIDED PER
EXPANSION JOINT MANUFACTURERS
ASSOCIATION STANDARDS

DESIGN DATA:
MAX. WRK. PRESSURE: 200 P.S.I.G.
TEST PRESSURE: 300 P.S.I.G.
MAX. TEMP 400° F
1 3/4" AXIAL COMPRESSION
1/4" AXIAL EXTENSION

QTY	PIPE SIZE	MODEL NUMBER	OVERALL LENGTH	OUTSIDE DIAMETER	EFFECTIVE AREA	APROX. WEIGHT	SPRING RATE (LBS/IN)
	3/4"	EXCS075	12 1/2"	2 3/8"	2.2	2.2	39.85
	1"	EXCS100	12 1/2"	2 3/8"	2.2	2.4	49.67
	1 1/4"	EXCS125	13-13/16"	2 3/4"	3.5	3.1	67.83
	1 1/2"	EXCS150	13-13/16"	2 3/4"	3.5	3.3	207.62
	2"	EXCS200	13-13/16"	2 3/4"	6.5	5.5	196.48
	2 1/2"	EXCS250	14-7/16"	4 3/8"	9.6	7.5	392.45
	3"	EXCS300	14-7/16"	5"	12.9	10	371.21

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: