


### TCHS-MMT OPEN (OAL)

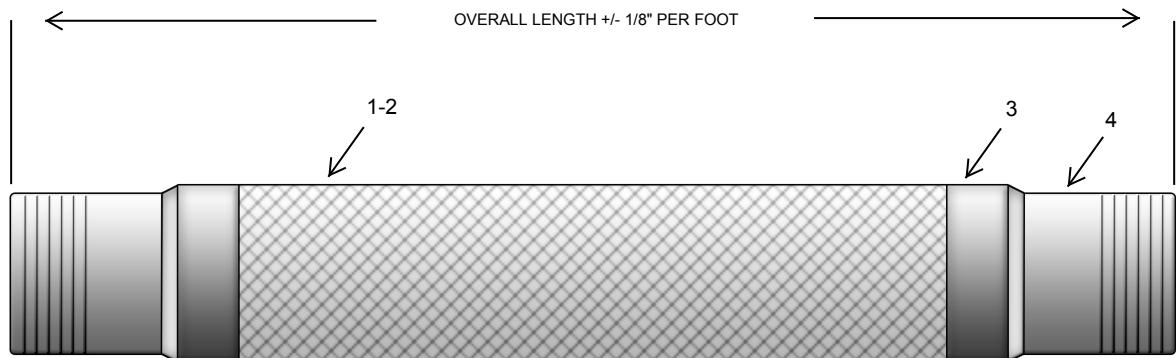

**MATERIALS**

- #1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID COLLAR: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

QTY	MODEL NUMBER	SIZE	OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET
	TCHS-025-MMT-(OAL)	1/4"		.42"	2240	3360	70° F	
	TCHS-038-MMT-(OAL)	3/8"		.62"	1100	1650	70° F	
	TCHS-050-MMT-(OAL)	1/2"		.76"	796	1194	70° F	
	TCHS-075-MMT-(OAL)	3/4"		1.03"	597	895	70° F	
	TCHS-100-MMT-(OAL)	1"		1.32"	455	682	70° F	
	TCHS-125-MMT-(OAL)	1 1/4"		1.63"	441	661	70° F	
	TCHS-150-MMT-(OAL)	1 1/2"		1.91"	370	555	70° F	
	TCHS-200-MMT-(OAL)	2"		2.46"	370	555	70° F	
	TCHS-250-MMT-(OAL)	2 1/2"		3.45"	400	600	70° F	
	TCHS-300-MMT-(OAL)	3"		4.01"	288	431	70° F	
	TCHS-400-MMT-(OAL)	4"		5.03"	250	375	70° F	
	TCHS-500-MMT-(OAL)	5"		6.10"	200	300	70° F	
	TCHS-600-MMT-(OAL)	6"		7.15"	220	330	70° F	

**TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG**

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: