TWIN CITY HOSE, LLC.

UL CLASSIFIED MH59973
UL U LOOP MALE 3"

Lead-Free Flex™

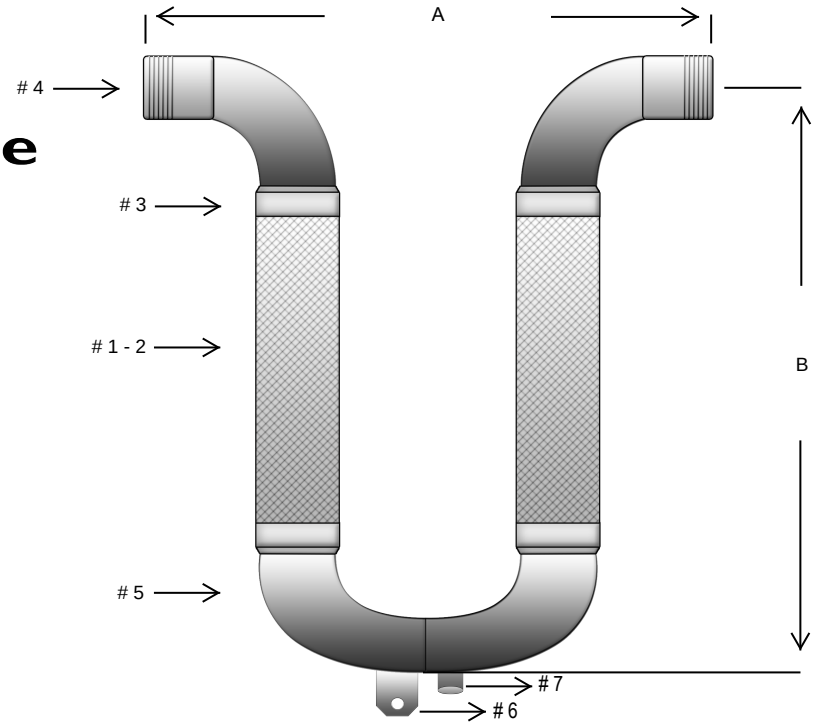

CLASSIFIED C UL US
WATER QUALITY
DRINKING WATER SYSTEM COMPONENT
NSF/ANSI 61, NSF/ANSI 372
MH59973

MATERIALS

#1-2 HOSE & BRAID: T-321 STAINLESS STEEL HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID

#3 BRAID BAND: T-304 STAINLESS STEEL

#4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

#5 ELBOWS: SCH. 40 CARBON STEEL

#6 HANGER

7 DRAIN PORT (OPTIONAL): ☐

QTY	MODEL NUMBER	SIZE	"A" DIM.	"B" DIM.	MAX WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	UL-SL050013	½"	17"	14 ¼"	1100	4400	70°F	3"	2
	UL-SL075013	¾"	16 ½"	15 ¼"	800	1200	70°F	3"	2.5
	UL-SL100013	1"	18"	16 ¾"	750	1125	70°F	3"	4.5
	UL-SL125013	1 ¼"	18 ½"	20 ½"	725	1088	70°F	3"	6
	UL-SL150013	1 ½"	20"	21 ¾"	565	850	70°F	3"	9
	UL-SL200013	2"	22"	24 ¼"	500	750	70°F	3"	13
	UL-SL250013	2 ½"	24"	26 ½"	400	600	70°F	3"	22
	UL-SL300013	3"	24"	29 ¾"	288	431	70°F	3"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY: _____ **DRAWING NUMBER:** 1 _____ **REV:** _____

SIGNATURE: _____ **DATE:** _____

PO NUMBER: _____ **PROJECT:** _____

CUSTOMER: _____ **NOTES:** ☐

20615 Commerce Blvd., Rogers, MN 55374 P 1-800-670-9475 F 763-428-5111 E sales@twincityhose.com W www.twincityhose.com