




**UL CLASSIFIED MH59973  
UL V90 GROOVE 4"**

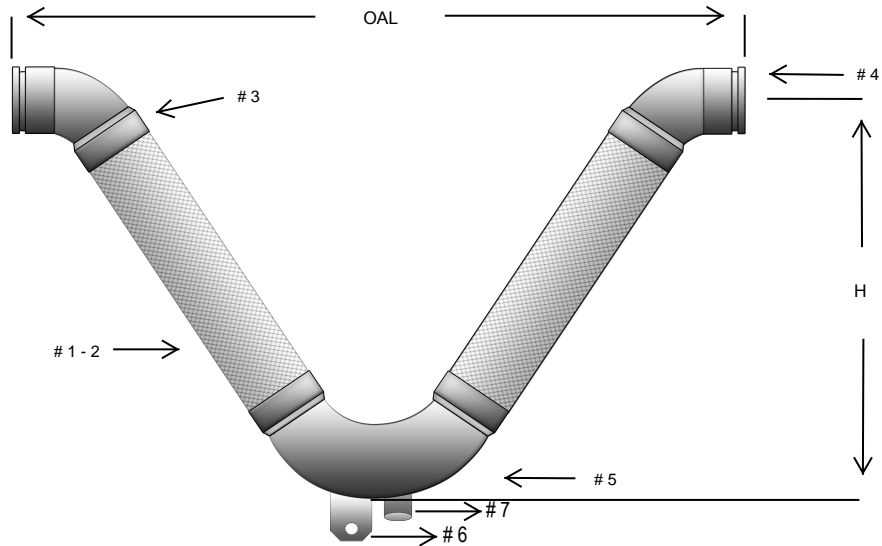

**MATERIALS**

- #1-2 HOSE & BRAID: T-321 STAINLESS STEEL HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID
- #3 BRAID COLLAR: T-304 STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE
- #5 ELBOWS: SCH. 40 CARBON STEEL
- #6 HANGER \*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

# 7 DRAIN PORT (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV200764	2"	42 3/4"	17"	500	750	4"	15
	UL-SV250764	2 1/2"	46"	18"	400	600	4"	22
	UL-SV300764	3"	50 1/4"	20"	288	431	4"	29
	UL-SV400764	4"	57 3/4"	23"	250	375	4"	47
	UL-SV500764	5"	64 3/4"	25 3/4"	200	300	4"	64
	UL-SV600764	6"	73"	29"	175	263	4"	102
	UL-SV800764	8"	89"	34 3/4"	212	318	4"	215
	UL-SV010764	10"	103"	40"	175	263	4"	360
	UL-SV012764	*12"	116"	45 1/4"	160	240	4"	495

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: