TWIN CITY HOSE, LLC.

# UL LISTED EX26784 FIRE SAFE FLEX V90 MMT CARBON STEEL

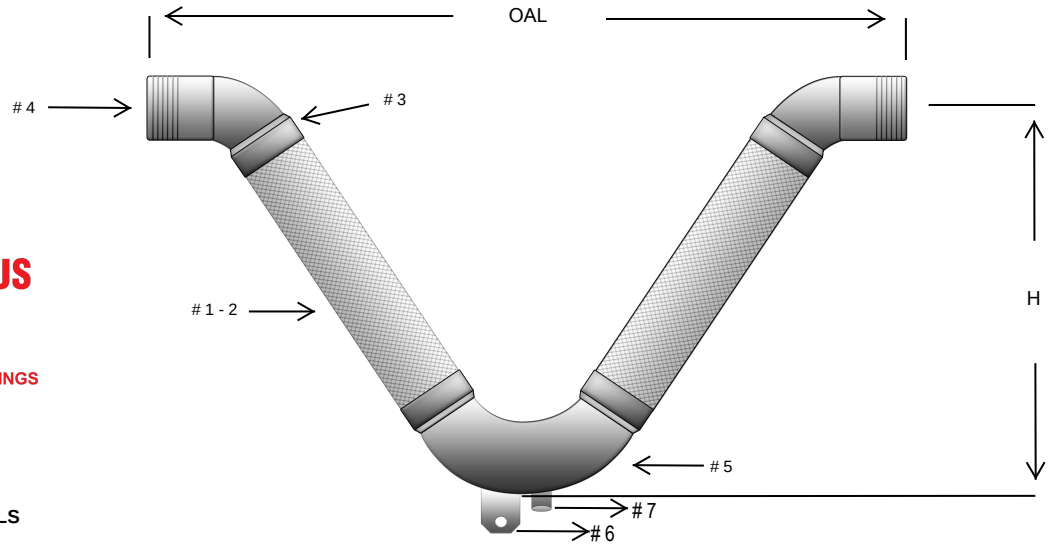


c UL us LISTED
FLEXIBLE JOINT FITTINGS
EX26784

**MATERIALS**

**#1-2 HOSE & BRAID:** T-321 STAINLESS STEEL HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID

**#3 BRAID COLLAR:** T-304 STAINLESS STEEL

**#4 END FITTING:** SCH 40 CARBON STEEL MALE NPT

**#5 ELBOWS:** SCH 40 CARBON STEEL

**#6 HANGER**

# 7 DRAIN PORT (OPTIONAL): ☐

"OAL" AND "H" DIMENSIONS ARE BASED UPON MOTION REQUIREMENTS

| QTY | MODEL NUMBER | SIZE | WRK. PSIG | OAL | "H" DIM. | MOTION X,Y,Z | WT. LBS. |
|---|---|---|---|---|---|---|---|
| | UL-SV050MMT-SSF04 | 1/2" | 300 | 28 ¼" | 10 ¼" | 4" | 2 |
| | UL-SV075MMT-SSF04 | 3/4" | 300 | 29 ¼" | 11 ¼" | 4" | 3 |
| | UL-SV100MMT-SSF04 | 1" | 300 | 32 ¾" | 12 ½" | 4" | 5 |
| | UL-SV125MMT-SSF04 | 1 ¼" | 300 | 38" | 15" | 4" | 7 |
| | UL-SV150MMT-SSF04 | 1 ½" | 300 | 40" | 15 ¾" | 4" | 9 |
| | UL-SV200MMT-SSF04 | 2" | 300 | 42 ¾" | 17" | 4" | 15 |
| | UL-SV250MMT-SSF04 | 2 ½" | 300 | 46" | 18" | 4" | 25 |
| | UL-SV300MMT-SSF04 | 3" DB | 300 | 50 ¼" | 20" | 4" | 30 |
| | UL-SV400MMT-SSF04 | 4" | 175 | 57 ¾" | 23" | 4" | 35 |

THESE FITTINGS ARE SUITABLE FOR USE IN DRY PIPE SYSTEMS FOR TEMPERATURES -40°F

DB = DOUBLE BRAIDED

**DRAWN BY:** _____ **DRAWING NUMBER:** _____ **REV:** _____

**SIGNATURE:** _____ **DATE:** _____

**PO NUMBER:** _____ **PROJECT:** _____

**CUSTOMER:** _____ **NOTES:** ☐

20615 Commerce Blvd., Rogers, MN 55374 P 1-800-670-9475 F 763-428-5111 E sales@twincityhose.com W www.twincityhose.com