




**UL CLASSIFIED MH59973**  
**UL SS V90 MMT 2"**

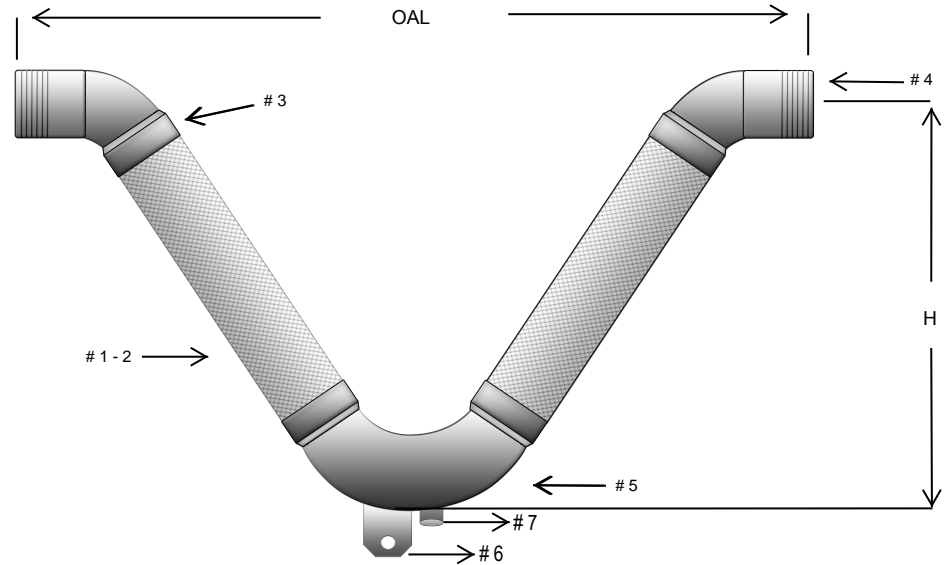

**MATERIALS**

**#1-2 HOSE & BRAID:** T-321 STAINLESS STEEL HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID

**#3 BRAID COLLAR:** T-304 STAINLESS STEEL

**#4 END FITTING:** STAINLESS STEEL MALE NPT

# 7 DRAIN PORT (OPTIONAL):

**#5 ELBOWS:** STAINLESS STEEL

**#6 HANGER**

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV050032	1/2"	23"	7 1/2"	1100	1650	2"	2
	UL-SV075032	3/4"	23 1/2"	8 1/2"	800	1200	2"	3
	UL-SV100032	1"	26 3/4"	9 1/2"	750	1125	2"	5
	UL-SV125032	1 1/4"	30 3/4"	11 1/2"	725	1088	2"	7
	UL-SV150032	1 1/2"	32 1/2"	12"	565	850	2"	9
	UL-SV200032	2"	35"	13"	500	750	2"	15
	UL-SV250032	2 1/2"	38 1/4"	14 1/4"	400	600	2"	25
	UL-SV300032	3"	41 3/4"	15 3/4"	288	431	2"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: