


EXCW

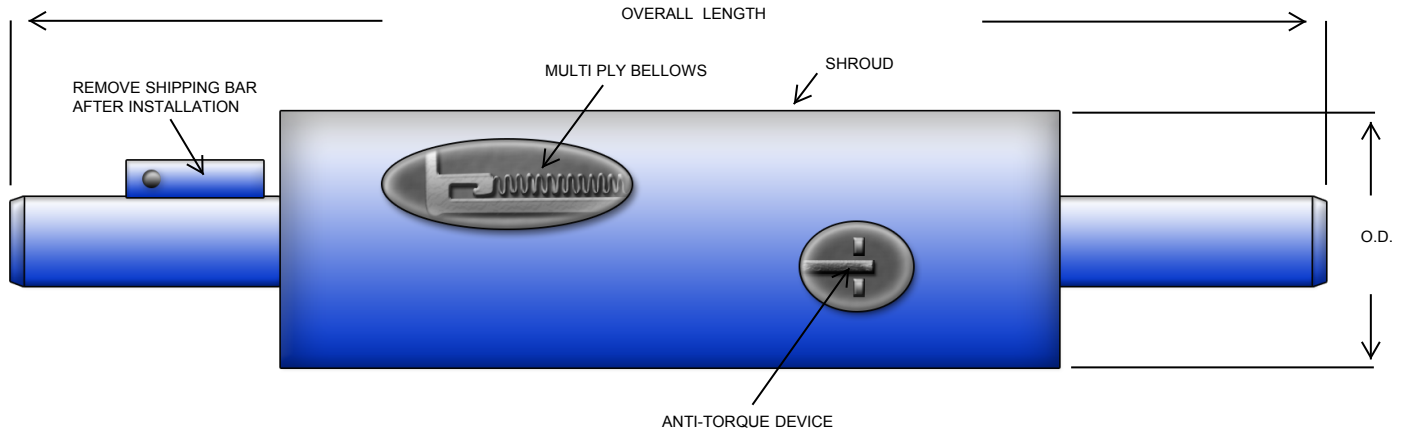

NOTE:
 FOR PROPER OPERATION ALL PIPING MUST
 BE PROPERLY ANCHORED AND GUIDED PER
 EXPANSION JOINT MANUFACTURERS
 ASSOCIATION STANDARDS

DESIGN DATA:
 MAX. WRK. PRESSURE: 200 P.S.I.G.
 TEST PRESSURE: 300 P.S.I.G.
 MAX TEMP 700° F
 1 3/4" AXIAL COMPRESSION
 1/4" AXIAL EXTENSION

QTY	PIPE SIZE	MODEL NUMBER	OVERALL LENGTH	OUTSIDE DIAMETER	EFFECTIVE AREA	APROX. WEIGHT	SPRING RATE (LBS/IN)
	3/4"	EXCW075	12 1/8"	3"	2.2	5.5	45.50
	1"	EXCW100	12 1/8"	3 1/2"	3.5	7	182.03
	1 1/4"	EXCW125	14 1/8"	4"	4.8	10.2	207.62
	1 1/2"	EXCW150	14 1/8"	4 1/2"	6.5	12.3	196.48
	2"	EXCW200	14 1/8"	4 1/2"	7.6	13.2	225.03
	2 1/2"	EXCW250	15 1/2"	5 1/2"	12.9	19.6	398.68
	3"	EXCW300	15-3/16"	6 1/2"	16.1	24.4	413.64
	4"	EXCW400	15-3/16"	7-3/32"	24.2	27.5	499.06

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: