


**UL CLASSIFIED MH59973
UL V90 PRESS END 3"**

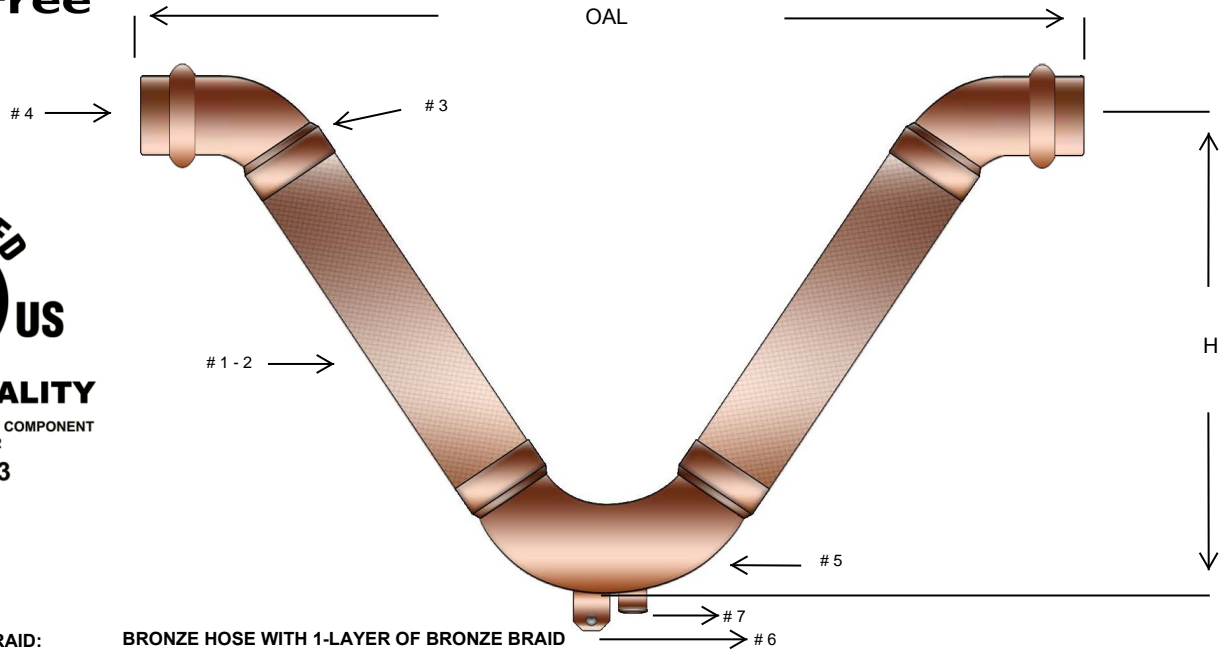

MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR BRONZE
- #4 END FITTING: COPPER FEMALE PRESS FITTING
- #5 ELBOWS: COPPER SWEAT 90 AND 45 DEGREE ELBOWS
- #6 HANGER
- #7 PORT (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	MOTION X,Y,Z	WT. LBS.
	UL-BV050-FPF-3	1/2"	22 3/4"	12"	566	849	70°F	3"	2
	UL-BV075-FPF-3	3/4"	25 3/4"	13"	468	701	70°F	3"	4
	UL-BV100-FPF-3	1"	27 3/4"	14 1/4"	334	501	70°F	3"	5
	UL-BV125-FPF-3	1 1/4"	30 3/4"	15 1/2"	306	459	70°F	3"	7
	UL-BV150-FPF-3	1 1/2"	32 1/4"	16"	297	445	70°F	3"	9
	UL-BV200-FPF-3	2"	35 3/4"	17 1/4"	210	315	70°F	3"	15
	UL-BV250-FPF-3	2 1/2"	43"	20"	194	291	70°F	3"	20
	UL-BV300-FPF-3	3"	48 1/4"	22 1/2"	166	249	70°F	3"	25
	UL-BV400-FPF-3	4"	55"	25 1/2"	145	217	70°F	3"	40

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG						
150° F	200° F	250° F	300° F	350° F	400° F	
0.92	0.89	0.86	0.83	0.81	0.78	

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: