


**UL CLASSIFIED MH59973
UL V90 PRESS END 4"**

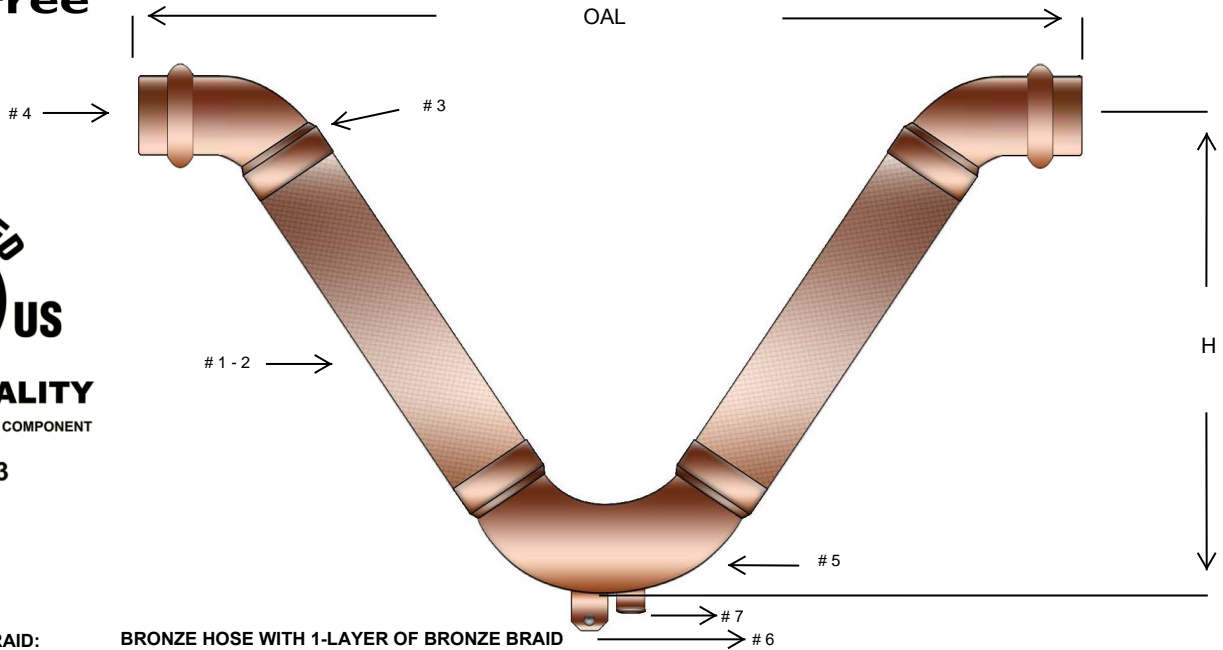

MATERIALS

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR BRONZE
- #4 END FITTING: COPPER FEMALE PRESS FITTING
- #5 ELBOWS: COPPER SWEAT 90 AND 45 DEGREE ELBOWS
- #6 HANGER
- #7 PORT (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	@ TEMP.	MOTION X,Y,Z	WT. LBS.
	UL-BV050-FPF-4	1/2"	26"	12"	566	849	70°F	4"	2
	UL-BV075-FPF-4	3/4"	29"	13"	468	701	70°F	4"	4
	UL-BV100-FPF-4	1"	30 1/2"	14 1/4"	334	501	70°F	4"	5
	UL-BV125-FPF-4	1 1/4"	34"	15 1/2"	306	459	70°F	4"	7
	UL-BV150-FPF-4	1 1/2"	35 1/2"	16"	297	445	70°F	4"	9
	UL-BV200-FPF-4	2"	39"	17 1/4"	210	315	70°F	4"	15
	UL-BV250-FPF-4	2 1/2"	46 3/4"	20"	194	291	70°F	4"	20
	UL-BV300-FPF-4	3"	52 3/4"	22 1/2"	166	249	70°F	4"	25
	UL-BV400-FPF-4	4"	56"	25 1/2"	145	217	70°F	4"	40

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG						
150° F	200° F	250° F	300° F	350° F	400° F	
0.92	0.89	0.86	0.83	0.81	0.78	

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: