


**UL CLASSIFIED MH59973
UL V90 SWEAT 4"**

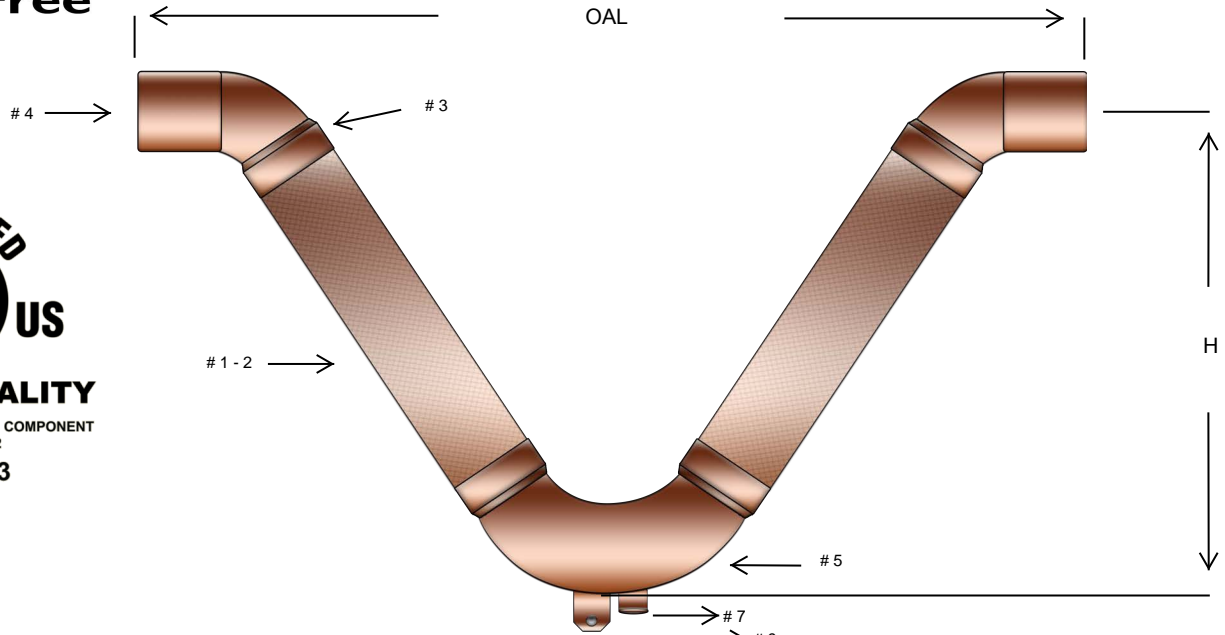

MATERIALS

- #1-2 HOSE & BRAID: BRONZE CORRUGATED HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER FEMALE SWEAT
- #5 ELBOWS: COPPER SWEAT 90 AND 45 DEGREE ELBOWS
- #6 HANGER
- #7 PORT (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-BV050814	1/2"	25"	12"	566	849	4"	2
	UL-BV075814	3/4"	28"	13"	468	701	4"	4
	UL-BV100814	1"	30 1/2"	14 1/4"	334	501	4"	5
	UL-BV125814	1 1/4"	33 1/4"	15 1/2"	306	459	4"	7
	UL-BV150814	1 1/2"	34 1/2"	16"	297	445	4"	9
	UL-BV200814	2"	37 3/4"	17 1/4"	210	315	4"	15
	UL-BV250814	2 1/2"	43 1/2"	20"	194	291	4"	20
	UL-BV300814	3"	48 3/4"	22 1/2"	166	249	4"	25
	UL-BV400814	4"	55 1/2"	25 1/2"	145	217	4"	40

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
150° F	200° F	250° F	300° F	350° F	400° F		
0.92	0.89	0.86	0.83	0.81	0.78		

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: