




**UL CLASSIFIED MH59973
UL SS V90 FLANGE 3"**



WATER QUALITY
DRINKING WATER SYSTEM COMPONENT
NSF/ANSI 61, NSF/ANSI 372
MH59973

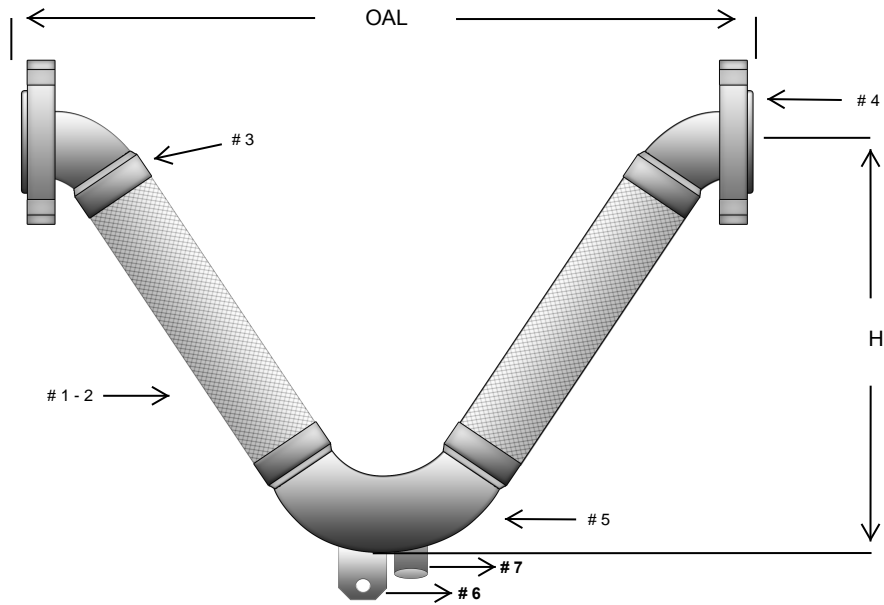

MATERIALS

#1-2 HOSE & BRAID: T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID

#3 BRAID COLLAR: T-304 STAINLESS STEEL

7 DRAIN PORT (OPTIONAL):

#4 END FITTING: 150# STAINLESS STEEL RAISED FACE SLIP ON FLANGE

#5 ELBOWS: STAINLESS STEEL
*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

#6 HANGER

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	MAX WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV200493	2"	33 3/4"	15 1/4"	500	750	3"	20
	UL-SV250493	2 1/2"	37"	16 1/4"	400	600	3"	28
	UL-SV300493	3"	41"	18"	288	431	3"	36
	UL-SV400493	4"	47 3/4"	20 3/4"	250	375	3"	54
	UL-SV500493	5"	54 1/2"	23 1/4"	200	300	3"	75
	UL-SV600493	6"	62 1/4"	26 1/2"	175	263	3"	115
	UL-SV800493	8"	76"	31 3/4"	212	318	3"	226
	UL-SV010493	10"	89"	36 3/4"	175	263	3"	370
	UL-SV012493	*12"	101 1/2"	41 1/2"	160	240	3"	525

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: