




**UL CLASSIFIED MH59973**  
**UL SS V90 GROOVE 2"**

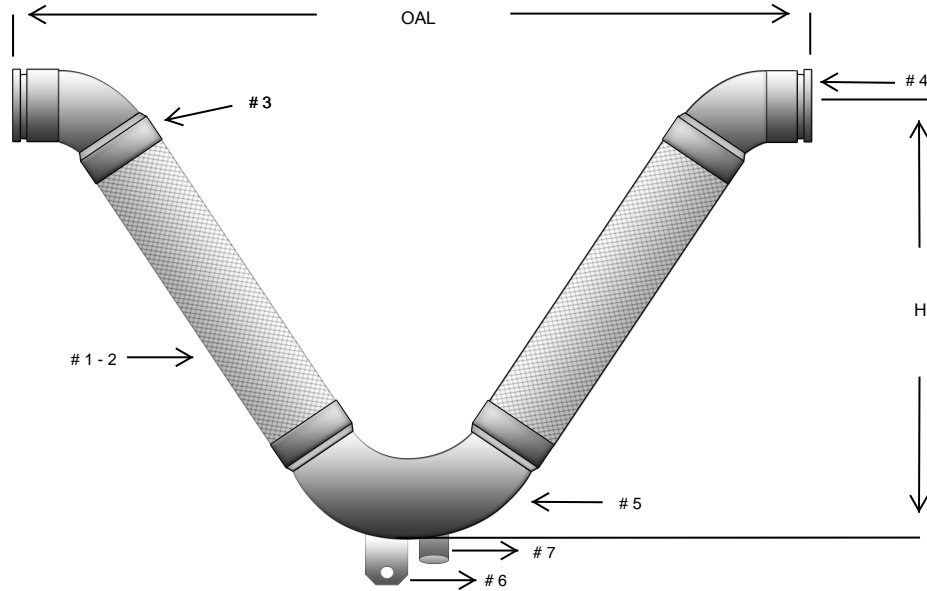

**MATERIALS**

- #1-2 HOSE & BRAID: T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID #7 DRAIN PORT (OPTIONAL):
- #3 BRAID COLLAR: T-304 STAINLESS STEEL
- #4 FITTINGS: STAINLESS STEEL GROOVE
- #5 ELBOWS: STAINLESS STEEL
- #6 HANGER \*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV200782	2"	35"	13"	500	750	2"	13
	UL-SV250782	2 1/2"	38 1/4"	14 1/4"	400	600	2"	19
	UL-SV300782	3"	41 3/4"	15 3/4"	288	431	2"	25
	UL-SV400782	4"	48"	18 1/4"	250	375	2"	43
	UL-SV500782	5"	54 1/2"	20 3/4"	200	300	2"	59
	UL-SV600782	6"	61 1/2"	23 1/2"	175	263	2"	98
	UL-SV800782	8"	76"	28 1/4"	212	318	2"	195
	UL-SV010782	10"	88 1/2"	32 3/4"	175	263	2"	328
	UL-SV012782	12"	100"	37 1/4"	160	240	2"	450

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: