




UL CLASSIFIED MH59973
UL V90 GROOVE 3"



WATER QUALITY
DRINKING WATER SYSTEM COMPONENT
NSF/ANSI 61, NSF/ANSI 372
MH59973

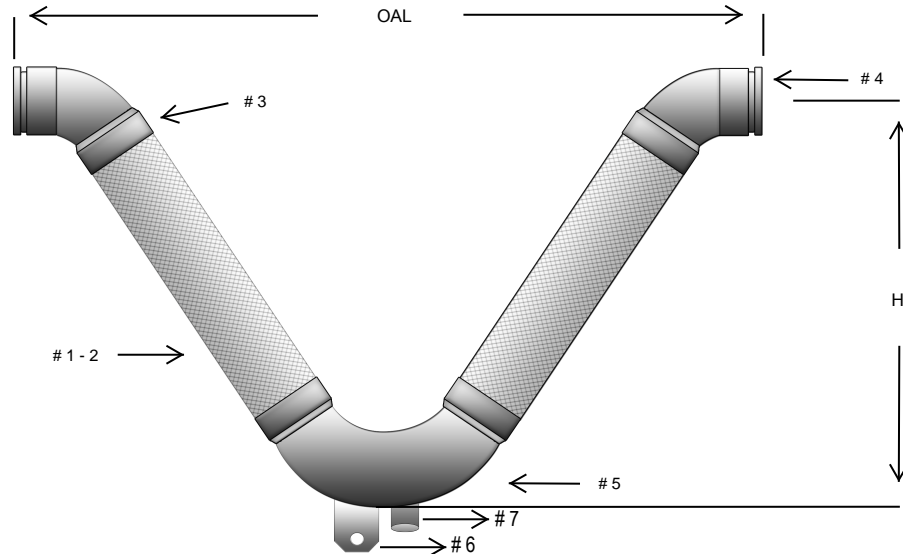

MATERIALS

- #1 -2 HOSE & BRAID: T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID
- #3 BRAID COLLAR: T-304 STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL GROOVE END
- #5 ELBOWS: SCH. 40 CARBON STEEL
*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)
- #6 HANGER

7 DRAIN PORT (OPTIONAL):

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV200763	2"	39 1/4"	15 1/4"	500	750	3"	14
	UL-SV250763	2 1/2"	42 1/2"	16 1/4"	400	600	3"	21
	UL-SV300763	3"	46 1/2"	18"	288	431	3"	27
	UL-SV400763	4"	53"	20 3/4"	250	375	3"	45
	UL-SV500763	5"	59 3/4"	23 1/4"	200	300	3"	62
	UL-SV600763	6"	67 1/2"	26 1/2"	175	263	3"	100
	UL-SV800763	8"	83"	31 3/4"	212	318	3"	205
	UL-SV010763	10"	96 1/4"	36 3/4"	175	263	3"	345
	UL-SV012763	*12"	108 1/2"	41 1/2"	160	240	3"	475

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: