




**UL CLASSIFIED MH59973
UL V90 MMT 4"**

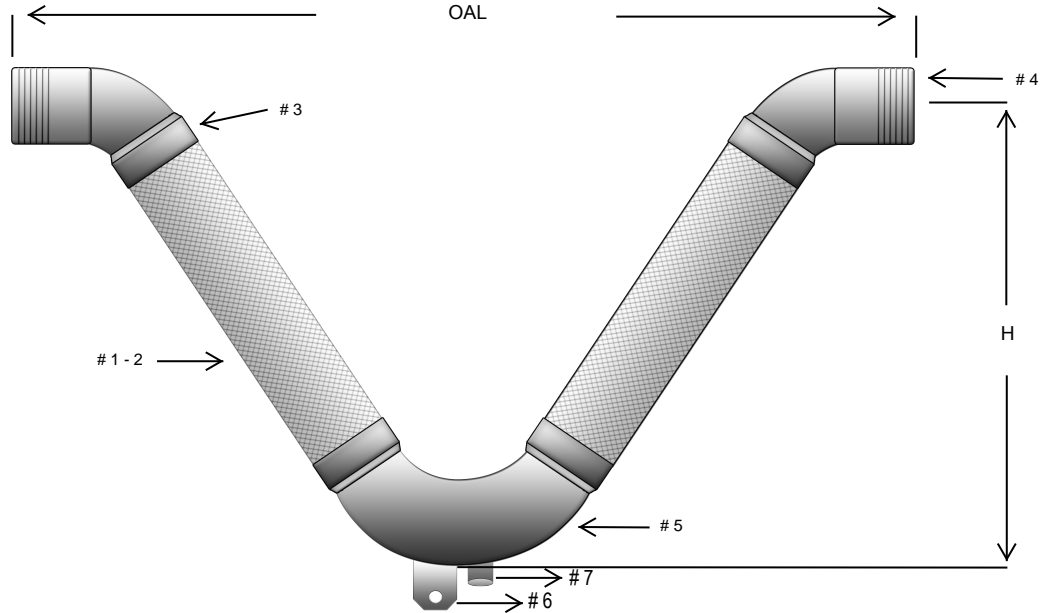

MATERIALS

- #1-2 HOSE & BRAID:** T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID
- #3 BRAID COLLAR:** T-304 STAINLESS STEEL **# 7 DRAIN PORT (OPTIONAL):**
- #4 END FITTING:** SCH. 40 CARBON STEEL MALE NPT
- #5 ELBOWS:** SCH. 40 CARBON STEEL
- #6 HANGER**

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV050014	1/2"	28 1/4"	10 1/4"	1100	1650	4"	2
	UL-SV075014	3/4"	29 1/4"	11 1/4"	800	1200	4"	3
	UL-SV100014	1"	32 3/4"	12 1/2"	750	1125	4"	5
	UL-SV125014	1 1/4"	38"	15"	725	1088	4"	7
	UL-SV150014	1 1/2"	40"	15 3/4"	565	850	4"	9
	UL-SV200014	2"	42 3/4"	17"	500	750	4"	15
	UL-SV250014	2 1/2"	46"	18"	400	600	4"	25
	UL-SV300014	3"	50 1/4"	20"	288	431	4"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY: _____ **DRAWING NUMBER:** _____ **REV:** _____

SIGNATURE: _____ **DATE:** _____

PO NUMBER: _____ **PROJECT:** _____

CUSTOMER: _____ **NOTES:** _____