




**UL CLASSIFIED MH59973**  
**UL SS V90 MMT 4"**

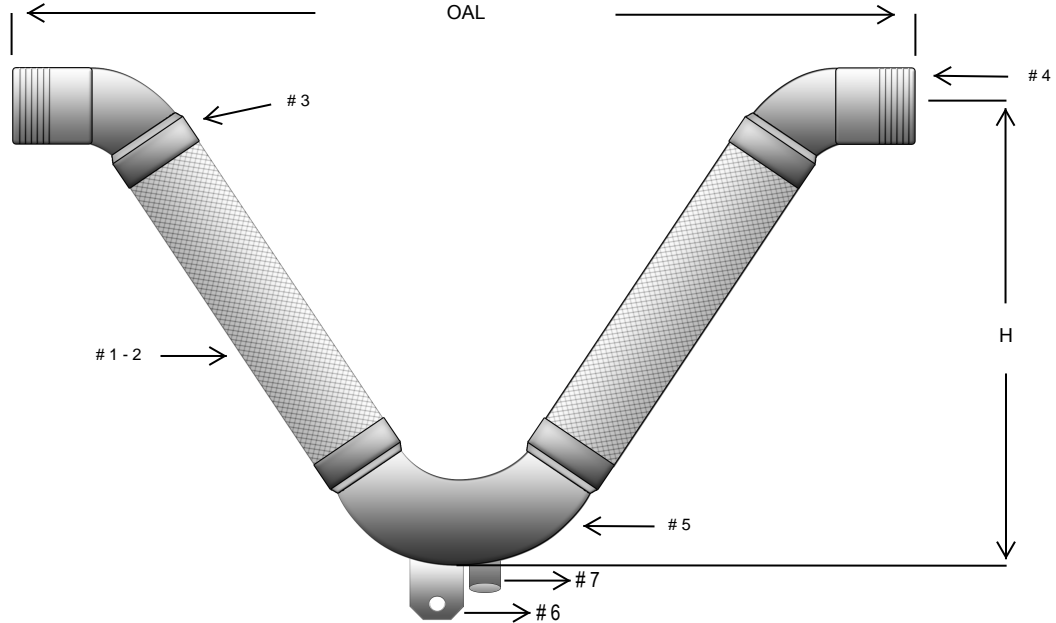

**MATERIALS**

#1-2 HOSE & BRAID: T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID

#3 BRAID COLLAR: T-304 STAINLESS STEEL

# 7 DRAIN PORT (OPTIONAL):

#4 END FITTING: STAINLESS STEEL MALE NPT

#5 ELBOWS: STAINLESS STEEL

**#6 HANGER**

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV050034	1/2"	28 1/4"	10 1/4"	1100	1650	4"	2
	UL-SV075034	3/4"	29 1/4"	11 1/4"	800	1200	4"	3
	UL-SV100034	1"	32 3/4"	12 1/2"	750	1125	4"	5
	UL-SV125034	1 1/4"	38"	15"	725	1088	4"	7
	UL-SV150034	1 1/2"	40"	15 3/4"	565	850	4"	9
	UL-SV200034	2"	42 3/4"	17"	500	750	4"	15
	UL-SV250034	2 1/2"	46"	18"	400	600	4"	25
	UL-SV300034	3"	50 1/4"	20"	288	431	4"	30

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: