


TCHS-MMT

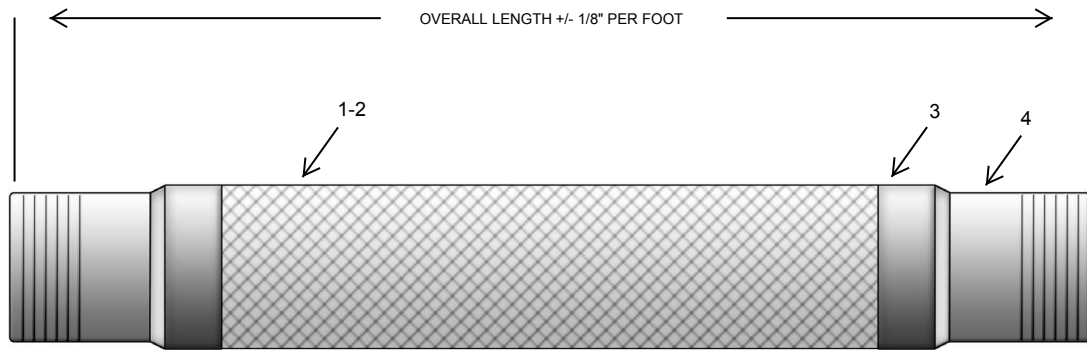

MATERIALS

- #1-2 HOSE & BRAID: STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID
- #3 BRAID COLLAR: STAINLESS STEEL
- #4 END FITTING: SCH. 40 CARBON STEEL MALE NPT

QTY	MODEL NUMBER	SIZE	OAL	MAX O.D.	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	TCHS-025-MMT	1/4"	6"	.42"	2240	3360	70° F	1/16"	1
	TCHS-038-MMT	3/8"	6"	.62"	1100	1650	70° F	1/16"	1
	TCHS-050-MMT	1/2"	6 1/2"	.76"	796	1194	70° F	1/16"	1
	TCHS-075-MMT	3/4"	7"	1.03"	597	895	70° F	1/16"	1
	TCHS-100-MMT	1"	8"	1.32"	455	682	70° F	1/16"	1
	TCHS-125-MMT	1 1/4"	8 1/2"	1.63"	441	661	70° F	1/16"	1
	TCHS-150-MMT	1 1/2"	9"	1.91"	370	555	70° F	1/16"	2
	TCHS-200-MMT	2"	10 1/2"	2.46"	370	555	70° F	1/16"	2
	TCHS-250-MMT	2 1/2"	12"	3.45"	400	600	70° F	1/16"	5
	TCHS-300-MMT	3"	12"	4.01"	288	431	70° F	1/16"	8
	TCHS-400-MMT	4"	12"	5.03"	250	375	70° F	1/16"	10
	TCHS-500-MMT	5"	16"	6.1"	200	300	70° F	1/16"	12
	TCHS-600-MMT	6"	16"	7.15"	165	247	70° F	1/16"	15

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: