




## V 90 MMT 2"

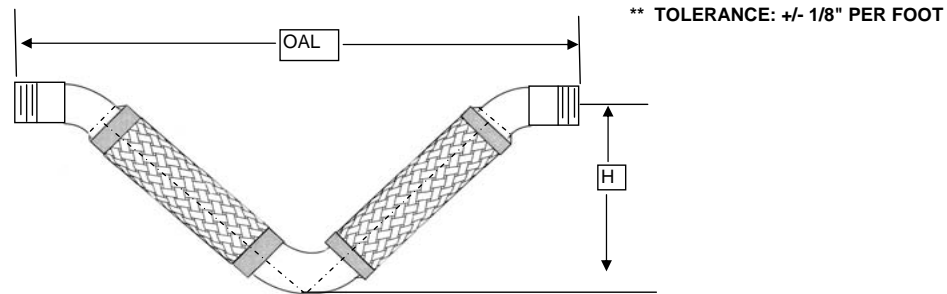

### MATERIALS:

**HOSE & BRAID:** T-321 STAINLESS STEEL HOSE 1-LAYER T-304 BRAID

**BRAID COLLAR:** T-304 STAINLESS STEEL

**FITTINGS:** CARBON STEEL SCH. 40 MALE NPT

**ELBOWS:** SCH. 40 CARBON STEEL

QTY	SIZE	LIVE LENGTH	OAL DIM.	"H" DIM.	WRK PSIG	MAX TEST	MOTION X,Y,Z	INT. BEND RADIUS	BRAID COLLAR	45 ELBOW	90 ELBOW	END FTG
	1/2"	8"	23"	8"	796	1194	2"	5	1	0.625	1.5	6
	3/4"	9"	24"	8.50"	597	896	2"	7	1.5	0.4375	1.125	6
	1"	10"	27.37"	10"	455	683	2"	8	1.5	0.875	1.5	6
	1-1/4"	11.25"	30"	11"	441	662	2"	10	1.5	1	1.875	6
	1-1/2"	13.75"	34.60"	13.20"	370	555	2"	13	1.5	1.125	2.25	6
	2"	14"	36.85"	14"	370	555	2"	16	1.5	1.375	3	6
	2.5"	16"	42.75"	16.60"	580	870	2"	21	2	1.75	3.75	6
	3"	17.50"	46.75"	18.40"	460	690	2"	25	2	2	4.5	6

**CUSTOMER:**

**PROJECT:**

**ENGINEER:**

**PO#:**

TWIN CITY HOSE, INC 20615 COMMERCE BLVD. ROGERS, MN 55374

Phone 800-670-9475 Fax 763-428-5111 [www.twincityhose.com](http://www.twincityhose.com)