


## U LOOP FLANGE 4"

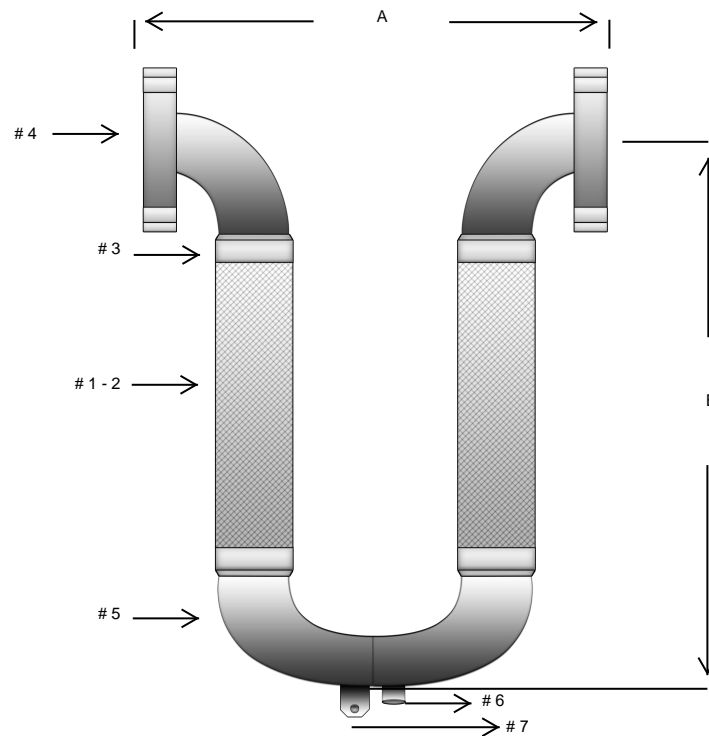

### MATERIALS

#1-2 HOSE & BRAID: STAINLESS STEEL HOSE WITH 1-LAYER OF STAINLESS STEEL BRAID

#3 BRAID BAND: STAINLESS STEEL

#4 END FITTING: CARBON STEEL PLATE FLANGE

#5 ELBOWS: SCH. 40 CARBON STEEL

\*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)

#6 PORT (OPTIONAL):

#7 HANGER (OPTIONAL):

**BUY**   
**AMERICAN**  
ACT COMPLIANT

QTY	MODEL #	SIZE	"A" DIM.	"B" DIM.	WRK. PSIG	@ TEMP.	MAX TEST	LATERAL OFFSET	WT. LBS.
	SL200484	2"	18"	28 1/2"	370	70°F	555	4"	19
	SL250484	2 1/2"	20 1/4"	28 1/4"	390	70°F	585	4"	30
	SL300484	3"	22 1/4"	31 1/2"	250	70°F	375	4"	38
	SL400484	4"	26 1/2"	37 1/4"	210	70°F	315	4"	61
	SL500484	5"	30 3/4"	45 3/4"	167	70°F	251	4"	96
	SL600484	6"	36 1/2"	49 1/4"	165	70°F	248	4"	139
	SL800484	8"	48 1/2"	62 3/4"	220	70°F	330	4"	280
	SL010484	10"	60 1/2"	72"	175	70°F	263	4"	455
	SL012484	*12"	72 1/2"	82 1/4"	160	70°F	240	4"	668

### TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG

200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F	800° F	900° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7	0.66	0.62

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: