




**UL CLASSIFIED MH59973**  
**UL TCHB - FS**

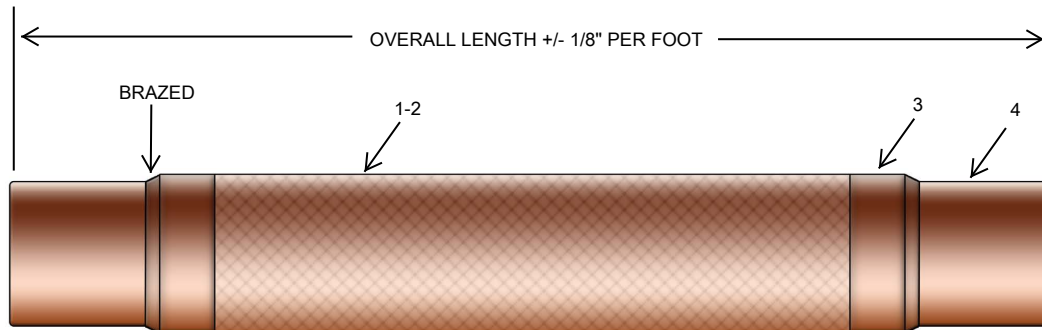

**MATERIALS**

- #1-2 HOSE & BRAID: BRONZE HOSE WITH 1-LAYER OF BRONZE BRAID
- #3 BRAID COLLAR: BRONZE
- #4 END FITTING: COPPER FEMALE SWEAT END

QTY	MODEL NUMBER	SIZE	OVERALL LENGTH	WRK. PSIG	MAX TEST	@ TEMP.	LATERAL OFFSET	WT. LBS.
	UL-TCHB-050-FS	1/2"	6 1/2"	566	849	70° F	1/16"	1
	UL-TCHB-075-FS	3/4"	7"	468	701	70° F	1/16"	1
	UL-TCHB-100-FS	1"	8"	334	501	70° F	1/16"	1
	UL-TCHB-125-FS	1 1/4"	8 1/2"	306	459	70° F	1/16"	2
	UL-TCHB-150-FS	1 1/2"	9"	297	445	70° F	1/16"	3
	UL-TCHB-200-FS	2"	10 1/2"	210	315	70° F	1/16"	4
	UL-TCHB-250-FS	2 1/2"	12"	194	291	70° F	1/16"	5
	UL-TCHB-300-FS	3"	12"	166	249	70° F	1/16"	8
	UL-TCHB-400-FS	4"	12"	145	217	70° F	1/16"	13

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG					
150° F	200° F	250° F	300° F	350° F	400° F
0.92	0.89	0.86	0.83	0.81	0.78

DRAWN BY: \_\_\_\_\_ DRAWING NUMBER: \_\_\_\_\_ REV: \_\_\_\_\_  
 SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_  
 PO NUMBER: \_\_\_\_\_ PROJECT: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_ NOTES: \_\_\_\_\_