


EXCM

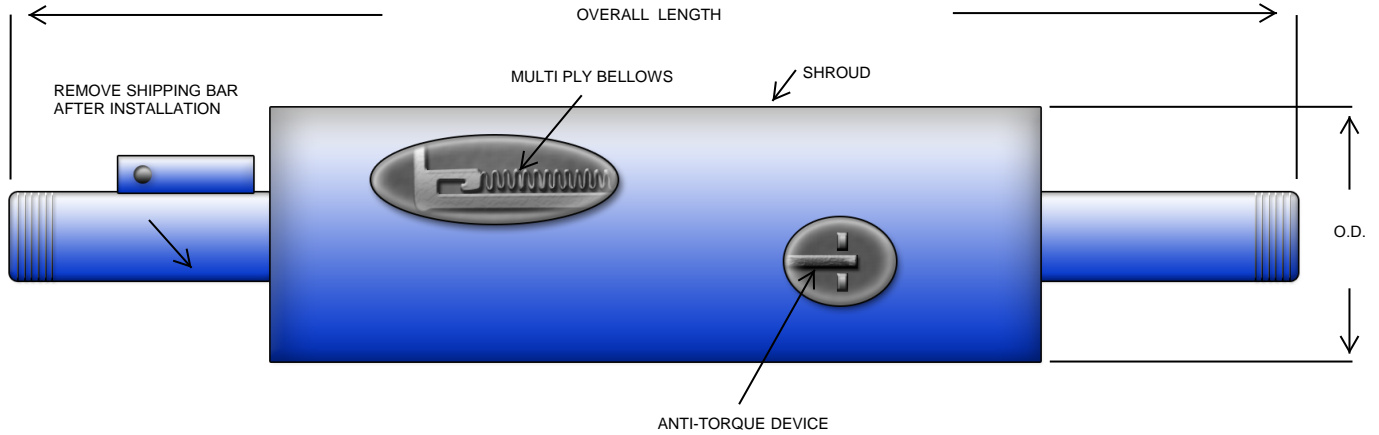

NOTE:
 FOR PROPER OPERATION ALL PIPING MUST
 BE PROPERLY ANCHORED AND GUIDED PER
 EXPANSION JOINT MANUFACTURERS
 ASSOCIATION STANDARDS

| DESIGN DATA: |
|----------------------------------|
| MAX. WRK. PRESSURE: 200 P.S.I.G. |
| TEST PRESSURE: 300 P.S.I.G. |
| MAX. TEMP 700° F |
| 1 3/4" AXIAL COMPRESSION |
| 1/4" AXIAL EXTENSION |

| QTY | PIPE SIZE | MODEL NUMBER | OVERALL LENGTH | OUTSIDE DIAMETER | EFFECTIVE AREA | APROX. WEIGHT | SPRING RATE BS IN |
|-----|-----------|--------------|----------------|------------------|----------------|---------------|-------------------|
| | 3/4" | EXCM075 | 12 1/8" | 3" | 2.2 | 5.5 | 45 50 |
| | 1" | EXCM100 | 12 1/8" | 3 1/2" | 3.5 | 7 | 182 03 |
| | 1 1/4" | EXCM125 | 14 1/8" | 4" | 4.8 | 10.2 | 207 62 |
| | 1 1/2" | EXCM150 | 14 1/8" | 4 1/2" | 6.5 | 12.3 | 196 48 |
| | 2" | EXCM200 | 14 1/8" | 4 1/2" | 7.6 | 13.2 | 225 03 |
| | 2 1/2" | EXCM250 | 15 1/2" | 5 1/2" | 12.9 | 19.6 | 398 68 |
| | 3" | EXCM300 | 15-3/16" | 6 1/2" | 16.1 | 24.4 | 413 64 |
| | 4" | EXCM400 | 15-3/16" | 7-3/32" | 24.2 | 27.5 | 499 06 |

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: