


**MPB**

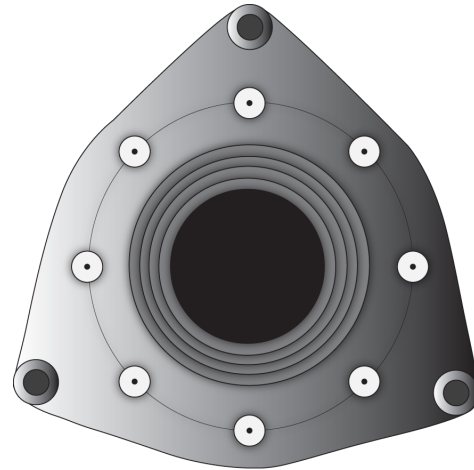

**NOTE: FOR PROPER OPERATION ALL PIPING MUST BE PROPERLY ANCHORED AND GUIDED**

**MAX TEMP : 850°F**

<b>DESIGN DATA:</b>
<b>AXIAL COMPRESSION 1/2"</b>
<b>AXIAL EXTENSION 1/8"</b>
<b>LATERAL OFFSET 1/8"</b>

QTY	PIPE SIZE	MODEL NUMBER	OVERALL LENGTH	WORKING PRESSURE		EFFECTIVE AREA IN. <sup>2</sup>	APROX. WEIGHT
				70° F	360° F		
	2	MPB200	4 3/8"	225	210	7	20
	2 1/2	MPB250	4 3/8"	225	210	7	24
	3	MPB300	4 3/8"	225	210	9	26
	4	MPB400	4 5/8"	225	210	15	35
	5	MPB500	4 7/8"	225	210	24	40
	6	MPB600	5"	225	210	33	46
	8	MPB800	5 7/8"	225	210	59	73
	10	MPB010	6 1/4"	225	210	94	94
	12	MPB012	6 5/8"	225	210	134	157
	14	MPB014	9 1/2"	225	210	171	247
	16	MPB016	10"	225	210	220	251

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: