




**UL CLASSIFIED MH59973**  
**UL SS V90 FLANGE 2"**



**WATER QUALITY**  
DRINKING WATER SYSTEM COMPONENT  
NSF/ANSI 61, NSF/ANSI 372  
**MH59973**

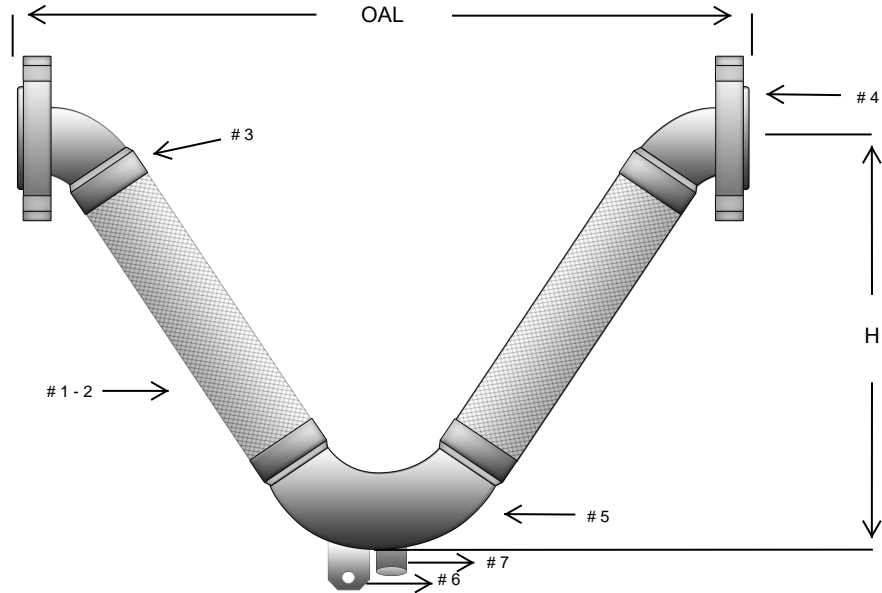

**MATERIALS**

- #1-2 HOSE & BRAID: T-321 STAINLESS STEEL CORRUGATED HOSE WITH 1-LAYER OF T-304 STAINLESS STEEL BRAID #7 DRAIN PORT (OPTIONAL):
- #3 BRAID COLLAR: T-304 STAINLESS STEEL
- #4 END FITTING: 150# STAINLESS STEEL RAISED FACE SLIP ON FLANGE
- #5 ELBOWS: STAINLESS STEEL \*12" ID AND LARGER ARE SCHEDULE STANDARD (STD)
- #6 HANGER

QTY	MODEL NUMBER	SIZE	OAL DIM.	"H" DIM.	MAX WRK. PSIG	MAX TEST	MOTION X,Y,Z	WT. LBS.
	UL-SV200492	2"	29 1/2"	13"	500	750	2"	19
	UL-SV250492	2 1/2"	32 3/4"	14 1/4"	400	600	2"	27
	UL-SV300492	3"	36 1/2"	15 3/4"	288	431	2"	34
	UL-SV400492	4"	42 3/4"	18 1/4"	250	375	2"	51
	UL-SV500492	5"	49 1/4"	20 3/4"	200	300	2"	75
	UL-SV600492	6"	56 1/4"	23 1/2"	175	263	2"	110
	UL-SV800492	8"	68 3/4"	28 1/4"	212	318	2"	218
	UL-SV010492	10"	81 1/4"	32 3/4"	175	263	2"	355
	UL-SV012492	*12"	93"	37 1/4"	160	240	2"	500

TEMPERATURE DERATING FACTORS: MULTIPLY X WRK. PSIG							
200° F	250° F	300° F	350° F	400° F	500° F	600° F	700° F
0.94	0.92	0.88	0.86	0.83	0.78	0.74	0.7

DRAWN BY:

DRAWING NUMBER:

REV:

SIGNATURE:

DATE:

PO NUMBER:

PROJECT:

CUSTOMER:

NOTES: